

VERTICAL TURBINE PUMP

FVTP Series - 50Hz



 **Zirantec**




www.zirantec.com

An ISO 9001 Company

CE


*For specific models only.

Zirantec

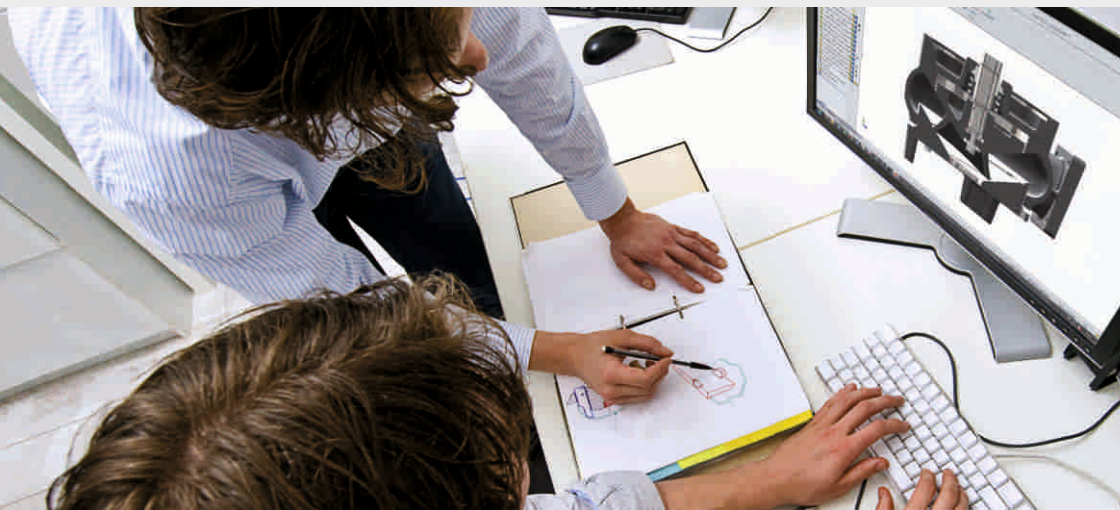

ZIRANTEC products are designed & manufactured by well qualified and experienced Engineers in state of the art manufacturing facilities

CERTIFICATION



ZIRANTEC Pumps & Motors are from the house of **Fabbrica Italiana Pompe Sommergibili S.r.l.** a four decades old Italian company of high repute, offering complete waste water solutions around the world. Its current product portfolio includes world class Waste Water Pumps of various types, Multistage Centrifugal Pressure Booster Pumps, Borehole Submersible Pumps & Motors, End Suction Centrifugal Pumps, Industrial Pumps for various applications.

Founded as early as 1978 in Rozzano, South of Milan, Italy by Mr.Orfeo Agostini, the company has witnessed steady growth and market expansion continuously ever since. In these four decades of existence, the company has carved a niche for itself in the waste water and sewage pump market in Italy and other countries. Its products are employed in Municipal, Domestic and Industrial applications. The Company is well known for the unique and robust designs of its products and their workmanship. Due to its superior quality ZIRANTEC products are also exported to many European, African and Asian countries.


ZIRANTEC's products are designed and manufactured to meet high quality Standards and they are 'CE' certified. The Facility is accredited with ISO 9001 Certification.

Over the years, the company has metamorphosed and ventured into manufacturing of high quality water pumps, for domestic, agricultural and industrial applications. In the due process, Fabbrica Italiana Pompe Sommergibili S.r.l. has shed its image of an exclusive sewage and waste water pumps manufacturer to a complete pump production company with an ability to manufacture diverse kinds of pumps for different applications.

C O N T E N T S

VERTICAL TURBINE PUMPS - FVTP SERIES (50Hz)	Page No.
Model Identification Code	5
Description	6
Key Features, Applications & Technical Specifications	7
Materials of Construction	8
General Dimensions and Mounting Details - Bowl Assembly	9
Cross Section view with Solid Shaft Motor for External Clear Water Lubrication	10
Cross Section view with Solid Shaft Motor for Self Water Lubrication	11
Cross Section view with Solid Shaft Motor for Oil Lubrication	12
Cross Section view with Vertical Hollow Shaft Motor for External Clear Water Lubrication	13
Cross Section view with Vertical Hollow Shaft Motor for Self Water Lubrication	14
Cross Section view with Vertical Hollow Shaft Motor for Oil Lubrication	15
Line Shaft Coupling Types	16
Thrust Bearing with Ratchet Arrangement	17
Lubrication Arrangement	18
Discharge Head with Above Ground Level Arrangement	19
General Arrangement Drawing (GAD) with Solid Shaft Motor	20
General Dimensions & Mounting Details for Solid Shaft Motor	21
General Arrangement Drawing (GAD) with Vertical Hollow Shaft Motor	22
General Dimensions & Mounting Details for Vertical Hollow Shaft Motor	23
Engine Driven Pump with Right Angle Gear Box	24
Performance Curves	25 - 40

MODEL IDENTIFICATION CODE

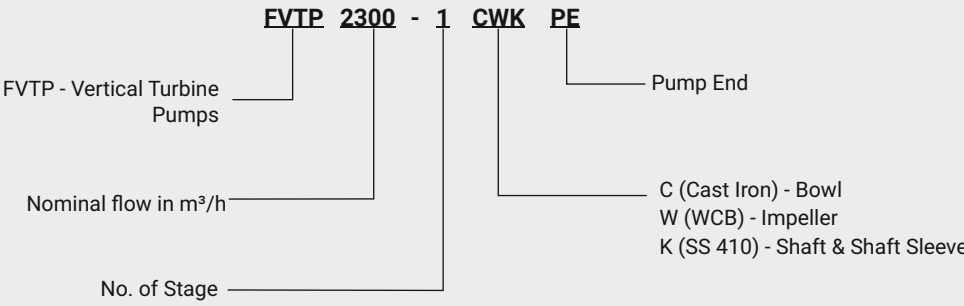

VERTICAL TURBINE PUMPS (FVTP SERIES)

DESCRIPTION

Vertical Turbine (FVTP) pumps are high-efficiency pumps designed for reliable operation in applications requiring the movement of large volumes of water. Available in both single-stage and multistage configurations, these pumps feature submerged impellers, enabling them to start without the need for priming. Depending on the flow requirements, they are equipped with either mixed flow or axial flow impellers to deliver high flow rates efficiently.

The pump assembly includes a transmission shaft housed within column pipes, supported by line shaft bearings. These bearings can be lubricated either through self-water or an external cooling system, depending on the installation environment and operating conditions.

FVTP pumps can be installed in both wet pit and dry pit configurations, offering flexibility to suit a wide range of site conditions. To enhance safety and operational reliability, a ratchet arrangement is provided on the coupling to prevent reverse rotation during shutdown or power failure. With the robust design and adaptability, Vertical Turbine pumps are a dependable solution for demanding water transfer applications.

■ Bowl

A diffuser with vanes cast integrally.

■ Impeller

Impellers are of mixed flow or axial flow.

■ Suction bell

Designed for smooth entry of water with minimum losses.

■ Strainer

Stainless steel basket type strainers are provided in standard installation in the suction bell to prevent large solids from entering the pump.

■ Shaft

The shaft materials provided are of high tensile strength.

■ Column Pipe

Column pipes are designed in such a way to transfer the water smoothly from bowl assembly to discharge head and the pipes are made either in casted or fabricated.

Bearings

■ Line Shaft Bearing

Cutlass bearings are of higher bond strength between rubber and shell material. Also provided in composite material like thordon and ferroform. Lubrication by self/external clear water. Oil lubrication will be provided with bronze bearing.

■ Discharge Head

Either casted or fabricated discharge head is provided to direct flow from column pipe to discharge head located above the ground level.

■ Thrust Bearing

Antifrictiontype bearings are provided for taking hydraulic axial thrust and weight of rotating unit. Lubrication with oil or grease. Non-reverse ratchet assembly provided to prevent reverse rotation of pump due to back flow of the water in case of its tripping.

■ Motor stool

Rigid and rugged construction to ensure vibration-free operation of pumpset.

■ Coupling

Flexible pin bush type couplings are generally provided to couple pump and motor. For line shaft coupling either threaded barrel type or muff couplings are provided.

■ Drive

Electric motor with solid shaft is a standard arrangement on request we can provide vertical hollow shaft drive also. Engine driven pumps are provided with right angle gear drive.

■ Direction of rotation

Clockwise when viewed from driving end.

KEY FEATURES

- Wide hydraulic ranges,
- Suction bell bearing provided for better stability
- Below and above ground level discharge head
- Radial bearing support between 1.5m shaft length
- Different material options
- Optional surface coating for efficiency improvement

APPLICATION

- Raw water intake and supply
- Main cooling water and makeup water supply in power plants
- Cooling tower
- Water Treatment plants
- Municipal water supply
- Dockyard and off shores platforms
- Flood Control
- Fire Fighting
- Irrigation
- Sugar, Refinery and steel plants

TECHNICAL SPECIFICATIONS

Component	50Hz
Head Range	10 - 250m
Flow Range	40 - 11000m³/h
Speed	590, 730, 980 & 1450rpm
Impeller Type	Closed Impeller
Outlet Size	6" - 36"
Power Range	5 - 1030kW
Maximum Liquid Temperature	-10°C to 90°C
Shaft Seal	Standard : Gland Packing Optional : Mechanical Seal
Bearing Lubrication	Self & External Lubrication
Flange Standard	DIN
Maximum working Pressure	16 - 25bar


MATERIAL OF CONSTRUCTION

Parts Name	Material (Code)	SAE/AISI	DIN	EUROPEAN
Bowl	Cast Iron (C)	ASTM A48 Class 40B	(0.6025) GG25	EN-GJL-250
Suction Bell	Cast Iron (C)	ASTM A48 Class 40B	(0.6025) GG25	EN-GJL-250
Impeller	Cast Iron (C)	ASTM A48 Class 40B	(0.6025) GG25	EN-GJL-250
	Bronze (B)	ASTMB 584 - C90500	DIN 1705 Rg 5	CuSn5Zn5Pb5C
	WCB (W)	ASTM A216 WCB	1.0619	GP240GH
	CF8 (S)	ASTM A743 / A351 CF8	1.4301	X5CrNi18-10
	CF8M (N)	ASTM A743 / A351 CF8M	1.4408	GX5CrNiMo19-11-2
Wear Ring	Cast Iron (C)	ASTM A48 Class 40B	(0.6025) GG25	EN-GJL-250
	Bronze (B)	ASTMB 584 - C90500	DIN 1705 Rg 5	CuSn5Zn5Pb5C
	CF8 (S)	ASTM A743 / A351 CF8	1.4301	X5CrNi18-10
	CF8M (N)	ASTM A743 / A351 CF8M	1.4408	GX5CrNiMo19-11-2
Shaft	SS410 (K)	ASTM A276 AISI 410	1.4006	X12Cr13
	SS304 (S)	ASTM A276 AISI 304	1.4301	X5CrNi18-10
	SS316 (N)	ASTM A276 AISI 316	1.4401	X5CrNiMo18-10
Sleeve	SS410 (K)	ASTM A276 AISI 410	1.4006	X12Cr13
	SS304 (S)	ASTM A276 AISI 304	1.4301	X5CrNi18-10
	SS316 (N)	ASTM A276 AISI 316	1.4401	X5CrNiMo18-10
Pipe Column	Mild Steel (MS)	ASTM-A283 GR.D	1.0044 (RSt 42-2, St 44-2)	Fe430B
Enclosing Pipe	Mild Steel (MS)	ASTM-A283 GR.D	1.0044 (RSt 42-2, St 44-2)	Fe430B
Cone Pipe	Cast Iron (C)	ASTM A48 Class 40B	(0.6025) GG25	EN-GJL-250
	Mild Steel (MS)	ASTM-A283 GR.D	1.0044 (RSt 42-2, St 44-2)	Fe430B
Discharge Head	Cast Iron (C)	ASTM A48 Class 40B	(0.6025) GG25	EN-GJL-250
	Mild Steel (MS)	ASTM-A283 GR.D	1.0044 (RSt 42-2, St 44-2)	Fe430B
Motor Stool	Cast Iron (C)	ASTM A48 Class 40B	(0.6025) GG25	EN-GJL-250
	Mild Steel (MS)	ASTM-A283 GR.D	1.0044 (RSt 42-2, St 44-2)	Fe430B
Sole Plate	Mild Steel (MS)	ASTM-A283 GR.D	1.0044 (RSt 42-2, St 44-2)	Fe430B
Strainer	SS304 (S)	ASTM A276 AISI 304	1.4301	X5CrNi18-10
Bearing Holder	Cast Iron (C)	ASTM A48 Class 40B	(0.6025) GG25	EN-GJL-250
Bowl and Line Shaft Bearing	Bronze / Ferroform / Thordon / Rubber	ASTM B505 C93800 / Ferroform / Thordon / Rubber	DIN 1716-1981 / Ferroform / Thordon / Rubber	G-CuPb15Sn Ferroform / Thordon / Rubber
Bearing Housing	Cast Iron (C)	ASTM A48 Class 40B	(0.6025) GG25	EN-GJL-250
Bearing Housing Cover	Cast Iron (C)	ASTM A48 Class 40B	(0.6025) GG25	EN-GJL-250
Key	SS410 (K)	ASTM A276 AISI 410	1.4006	X12Cr13
	SS304 (S)	ASTM A276 AISI 304	1.4301	X5CrNi18-10
	SS316 (N)	ASTM A276 AISI 316	1.4401	X5CrNiMo18-10
Pump & Motor Coupling	Cast Iron (C)	ASTM A48 Class 40B	(0.6025) GG25	EN-GJL-250
Gland	Cast Iron (C)	ASTM A48 Class 40B	(0.6025) GG25	EN-GJL-250

Impeller Optional Materials : Duplex, Super Duplex and other materials are available on request.

In view of continuous development, the informations / descriptions / specification / illustration are subjected to change without notice.

GENERAL DIMENSIONS AND MOUNTING DETAILS - BOWL ASSEMBLY

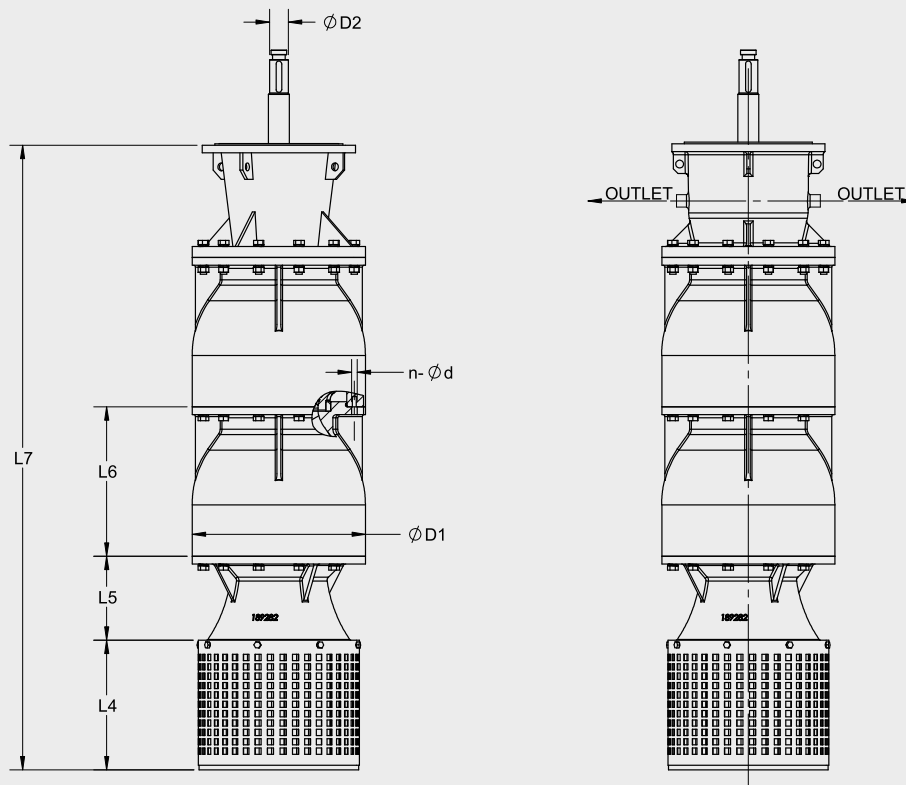

SELF WATER LUBRICATION

EXTERNAL OIL LUBRICATION


Model	L4	L5	L6	L7	D1	D2	n - Ød
FVTP - 40*	200	90	116	619	175	25	8 - Ø11
FVTP - 70*	200	100	134	646	202	30	8 - Ø11
FVTP - 115	212	108	155	688	235	35	8 - Ø12
FVTP - 170	209	170	175	734	282	40	12 - Ø14
FVTP - 270	212	160	201	782	325	45	12 - Ø14
FVTP - 400	213	168	230	825	340	50	12 - Ø14
FVTP - 500	214	185	249	920	365	55	12 - Ø18
FVTP - 700	320	205	276	1077	408	60	12 - Ø18
FVTP - 1000	355	235	418	1316	484	65	12 - Ø18
FVTP - 1600	400	269	478	1506	554	65	12 - Ø22
FVTP - 2300	431	287	476	1662	574	75	12 - Ø22
FVTP - 3300	479	320	533	1853	638	75	12 - Ø22
FVTP - 4500	602	385	672	2379	803	85	16 - Ø22
FVTP - 5500	638	440	756	2554	850	95	16 - Ø22
FVTP - 5600	638	440	756	2554	850	95	16 - Ø22
FVTP - 7300	698	485	830	2833	930	95	20 - Ø22
FVTP - 7400	698	485	830	2833	930	95	20 - Ø22
FVTP - 9500	818	555	970	3263	1090	100	24 - Ø22

* on request basis.


Note : All Dimensions are in mm, Unless Otherwise Specified

In view of continuous development, the informations / descriptions / specification / illustration are subjected to change without notice.


CROSS SECTION VIEW WITH SOLID SHAFT MOTOR FOR EXTERNAL CLEAR WATER LUBRICATION

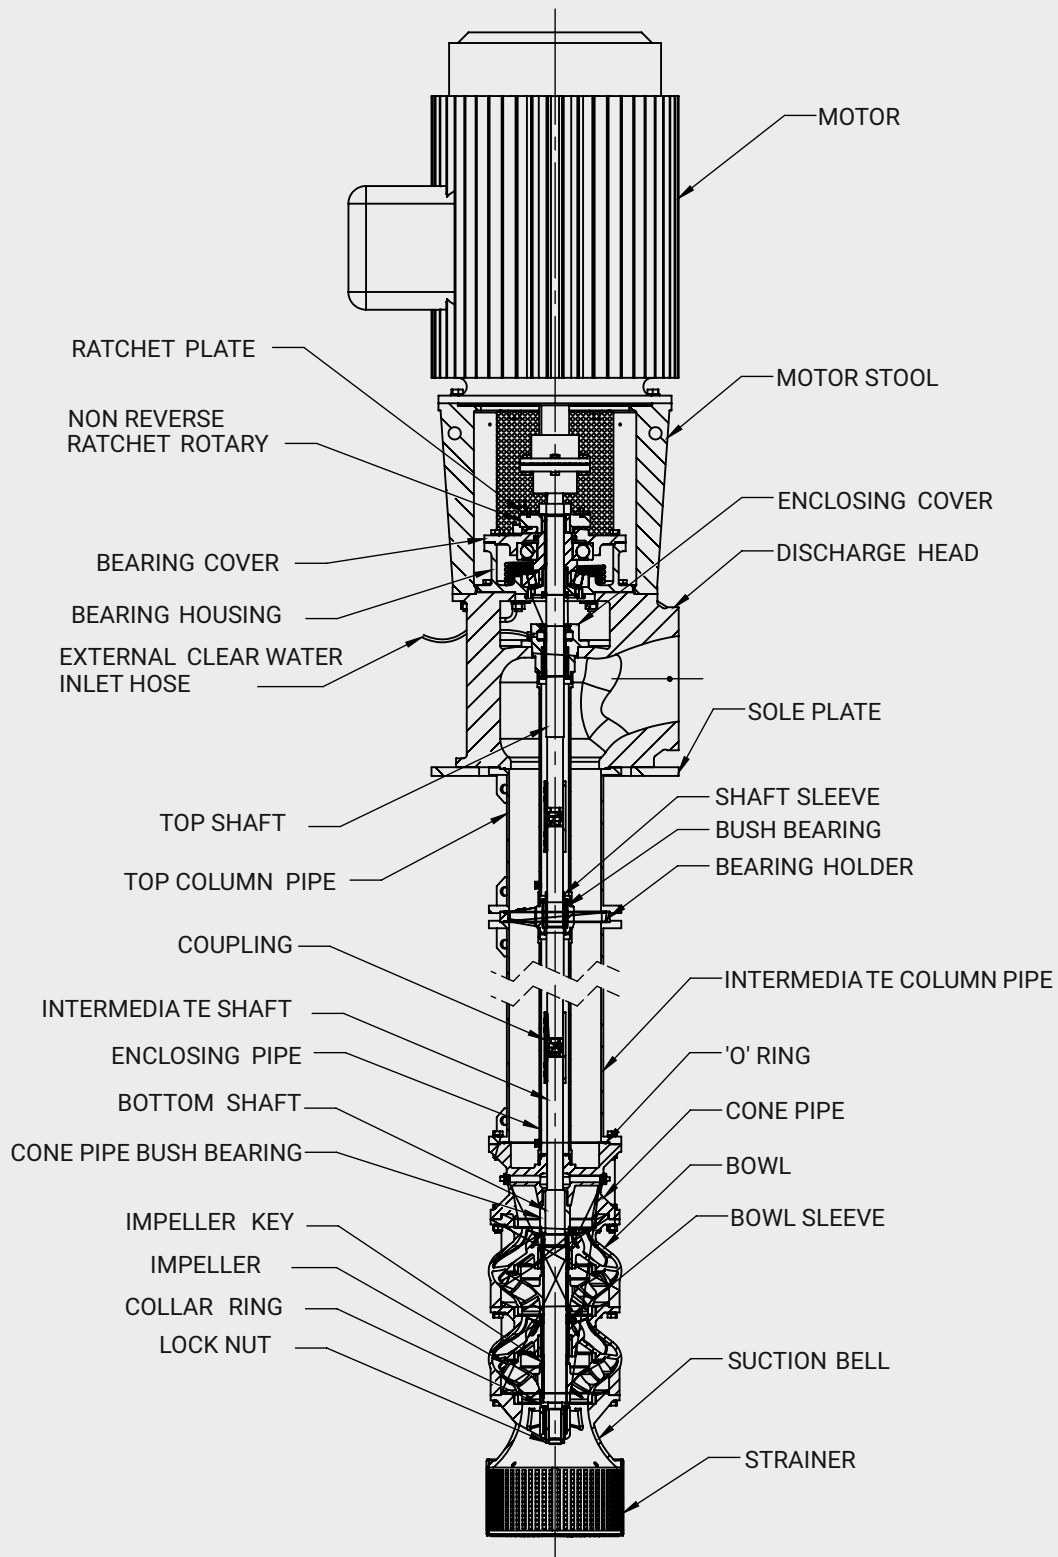


CROSS SECTION VIEW WITH SOLID SHAFT MOTOR FOR SELF WATER LUBRICATION

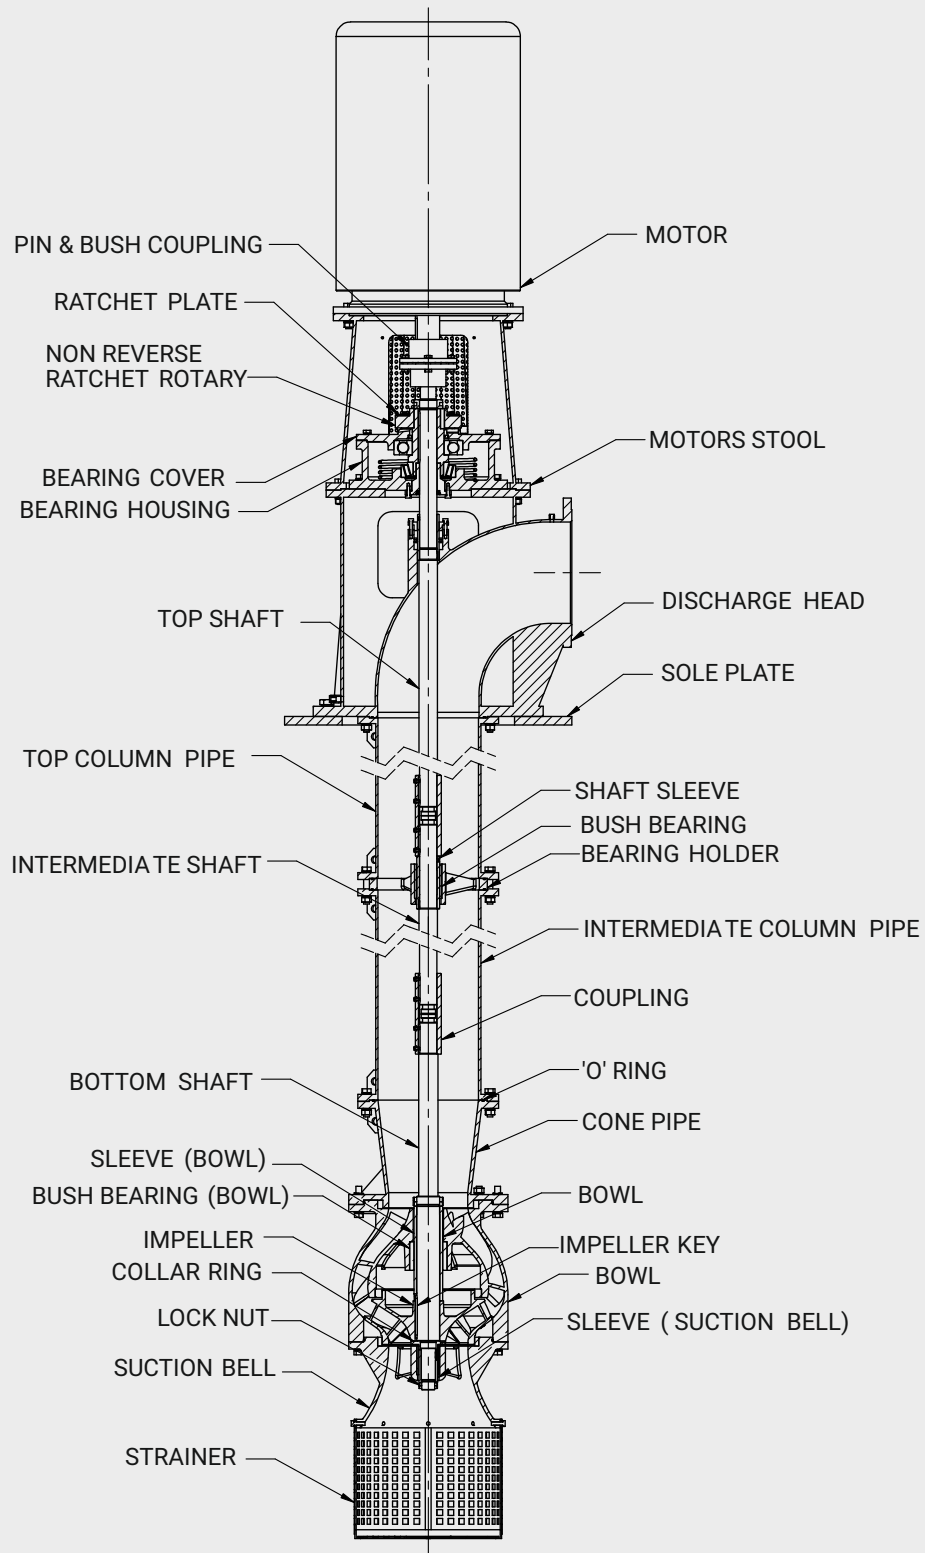


CROSS SECTION VIEW WITH SOLID SHAFT MOTOR FOR OIL LUBRICATION

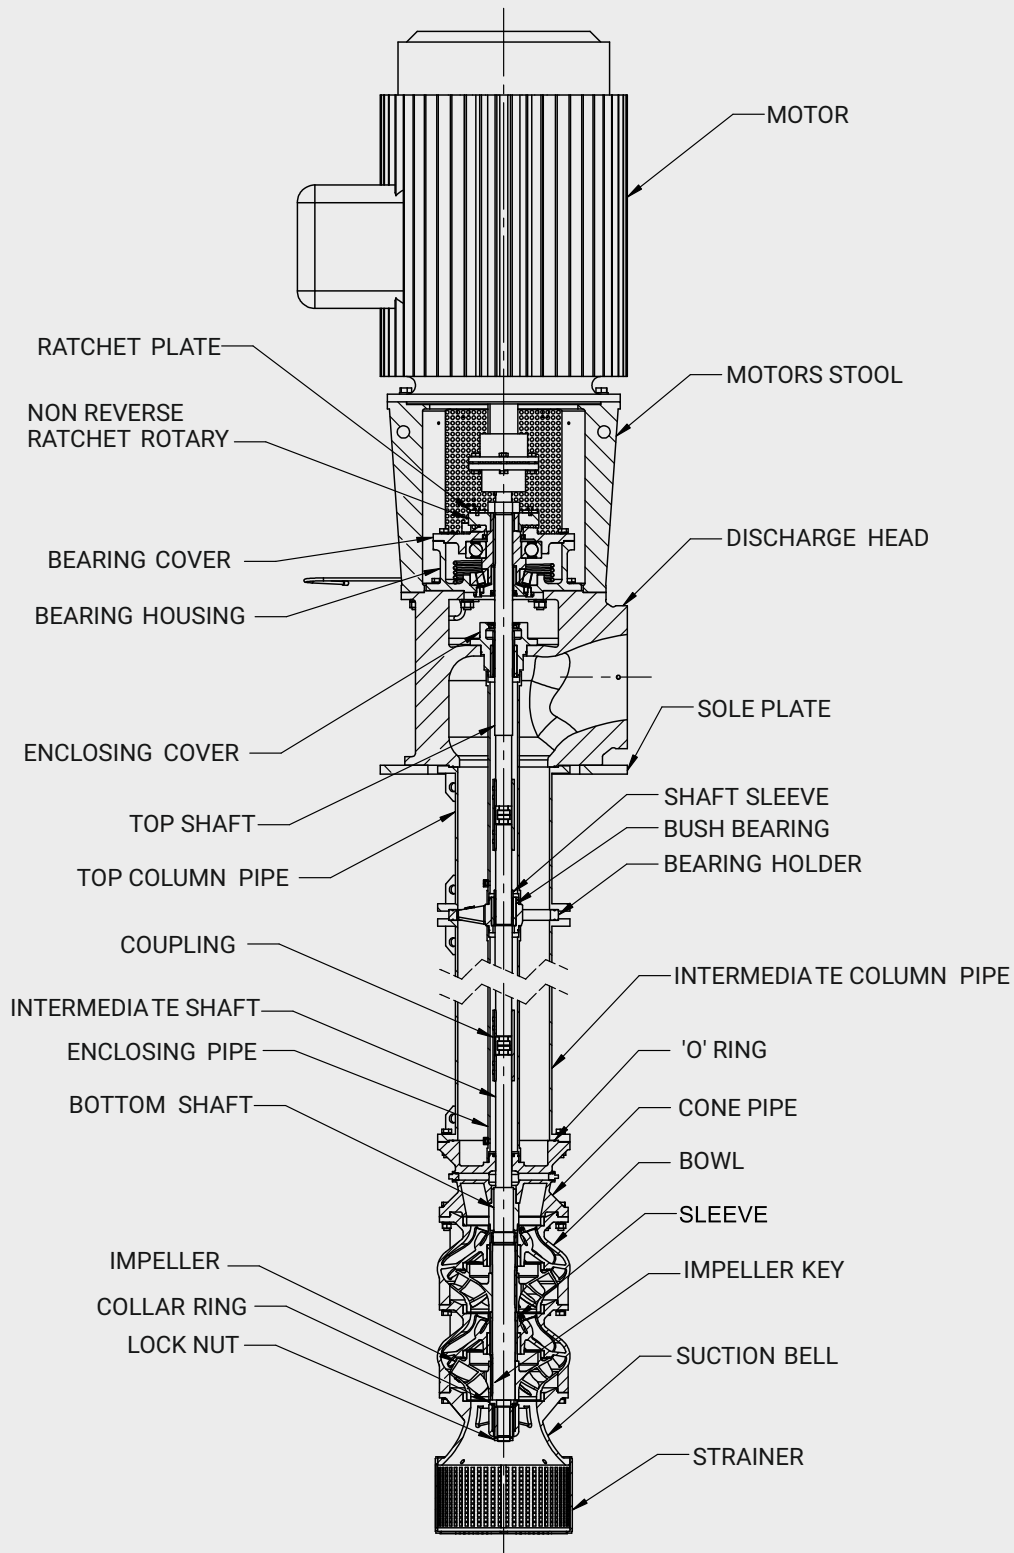


CROSS SECTION VIEW WITH VERTICAL HOLLOW SHAFT MOTOR FOR EXTERNAL CLEAR WATER LUBRICATION

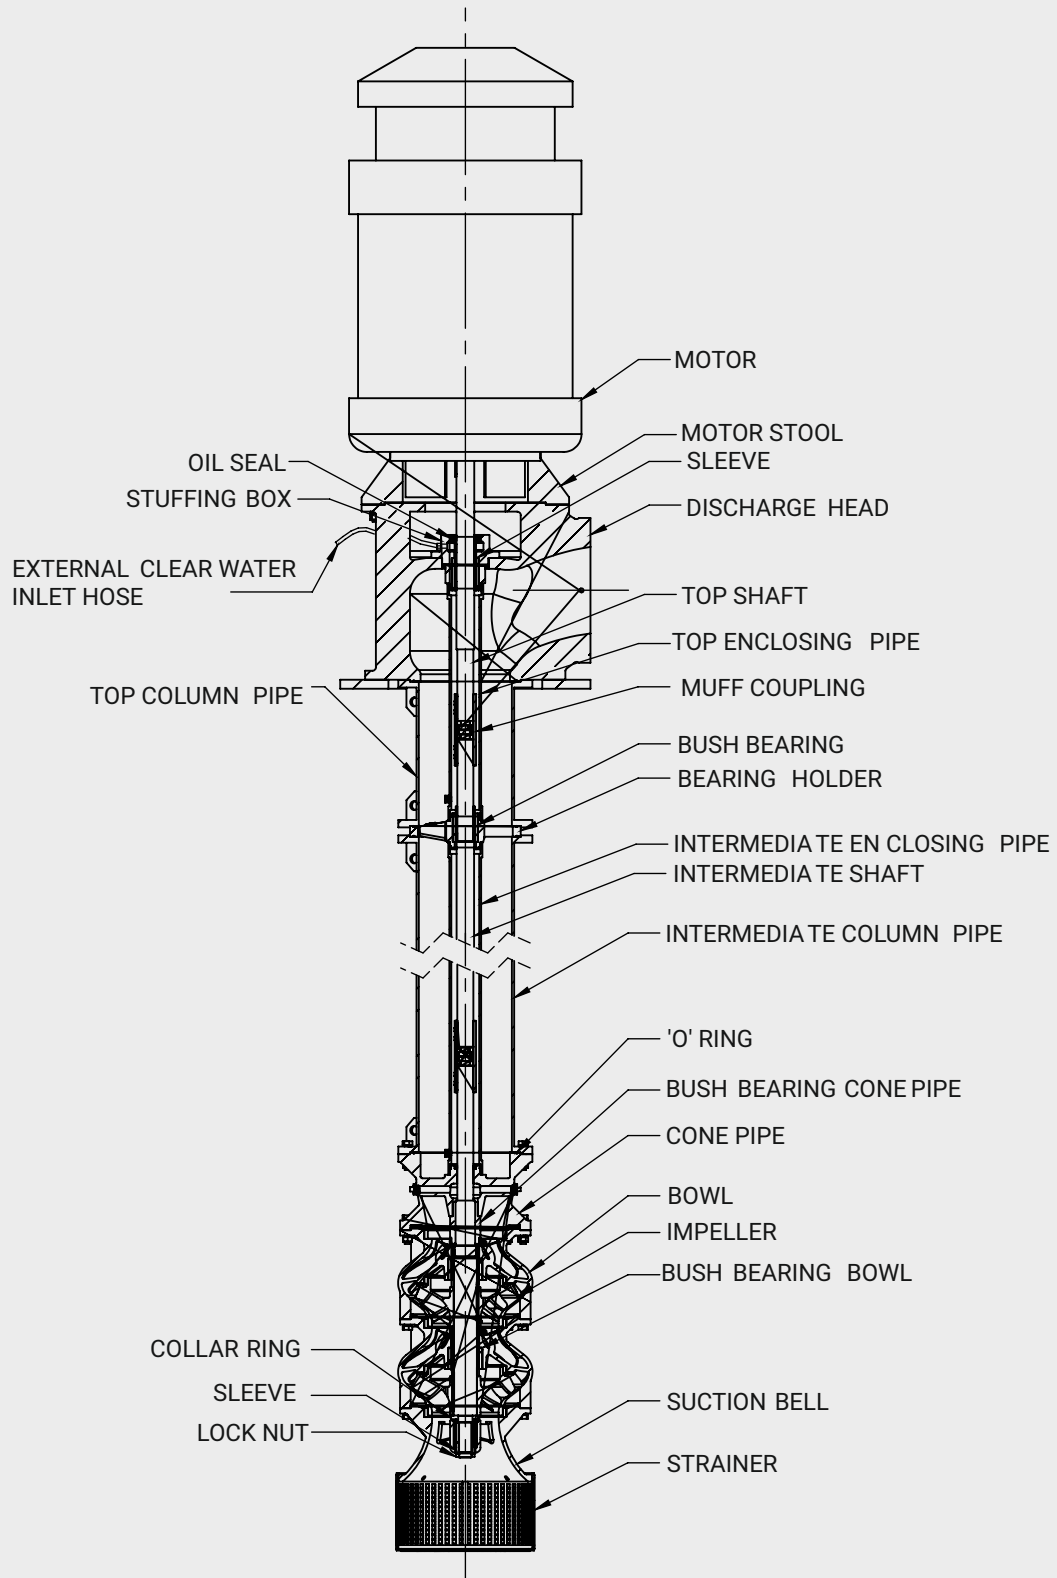


CROSS SECTION VIEW WITH VERTICAL HOLLOW SHAFT MOTOR FOR SELF WATER LUBRICATION

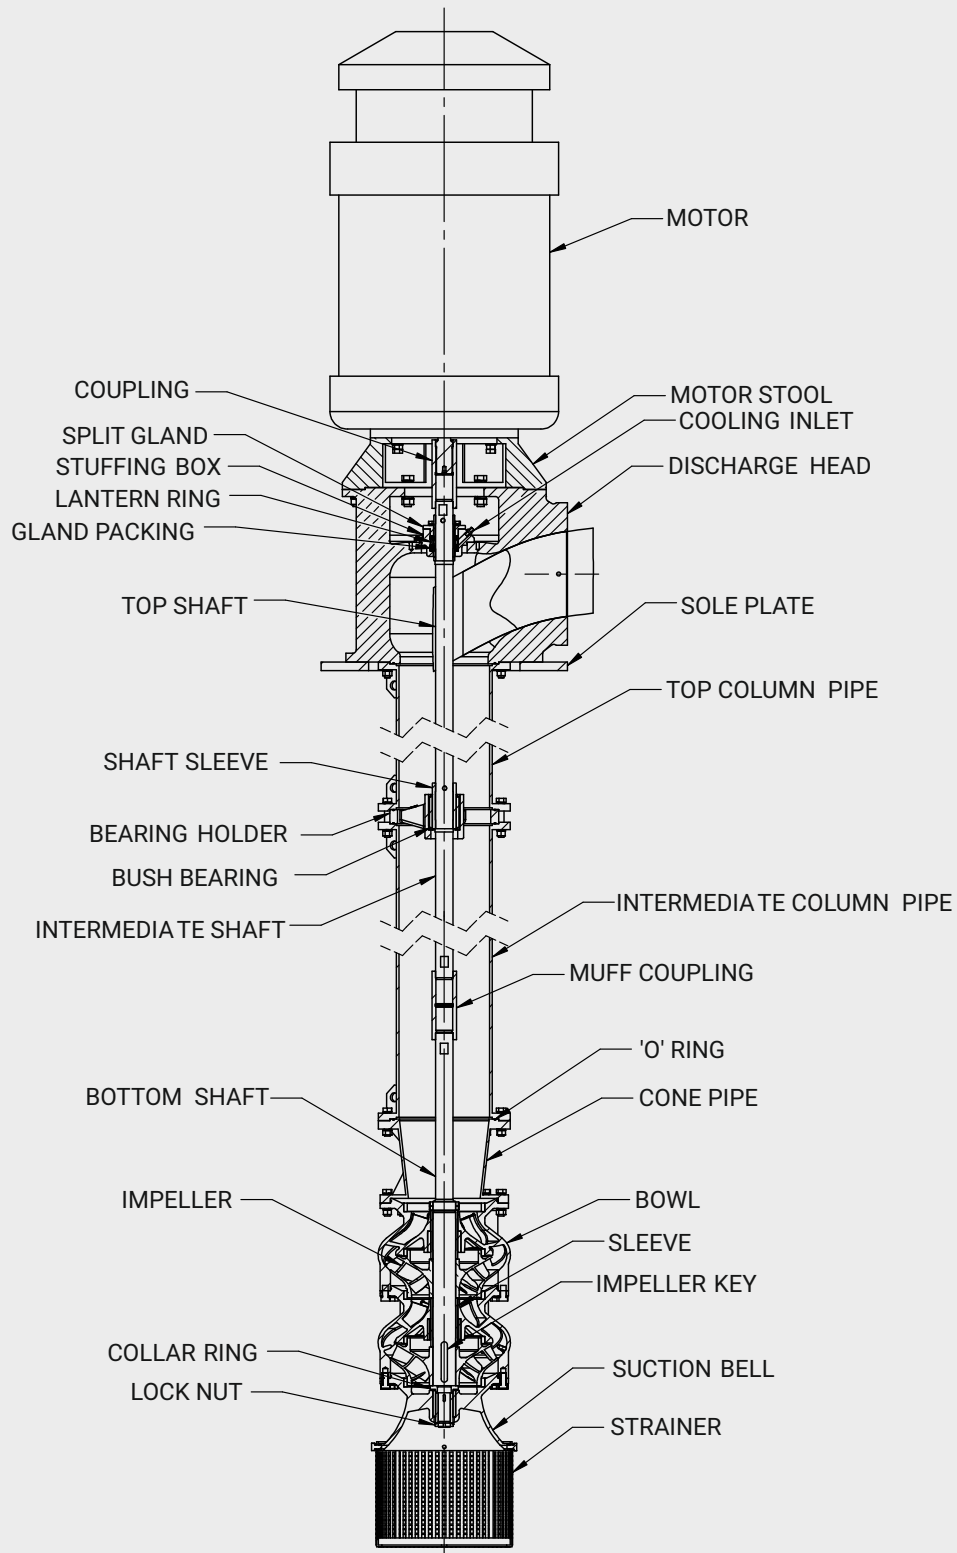


CROSS SECTION VIEW WITH VERTICAL HOLLOW SHAFT MOTOR FOR OIL LUBRICATION

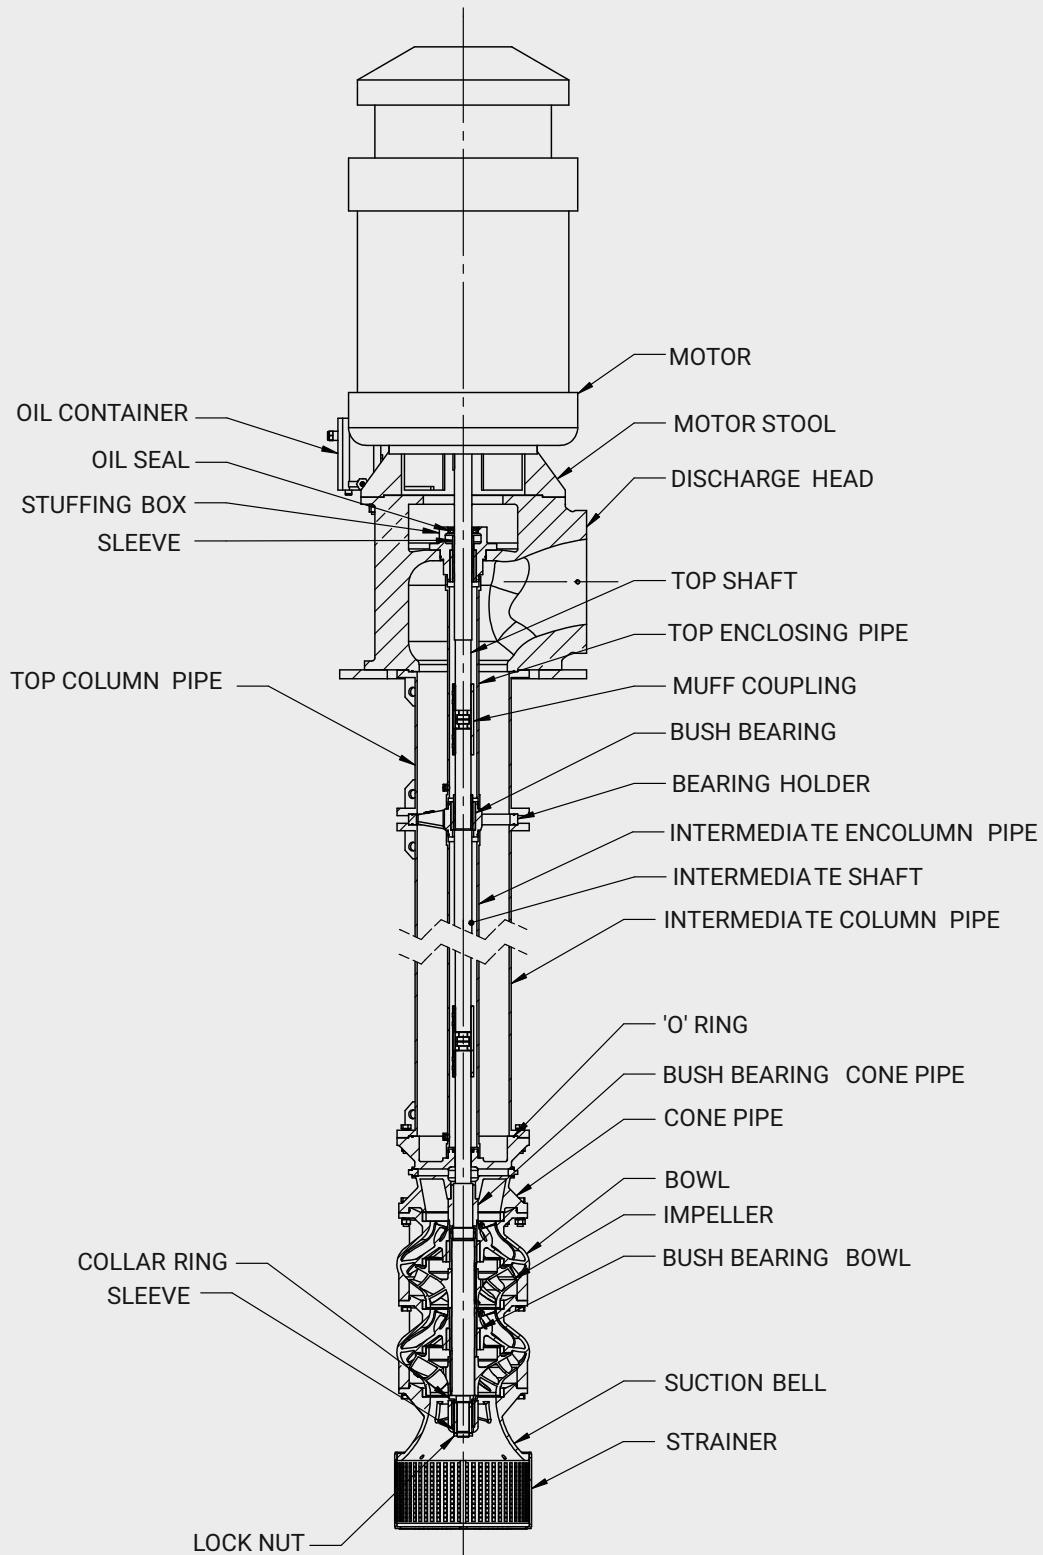

LINE SHAFT COUPLING TYPES

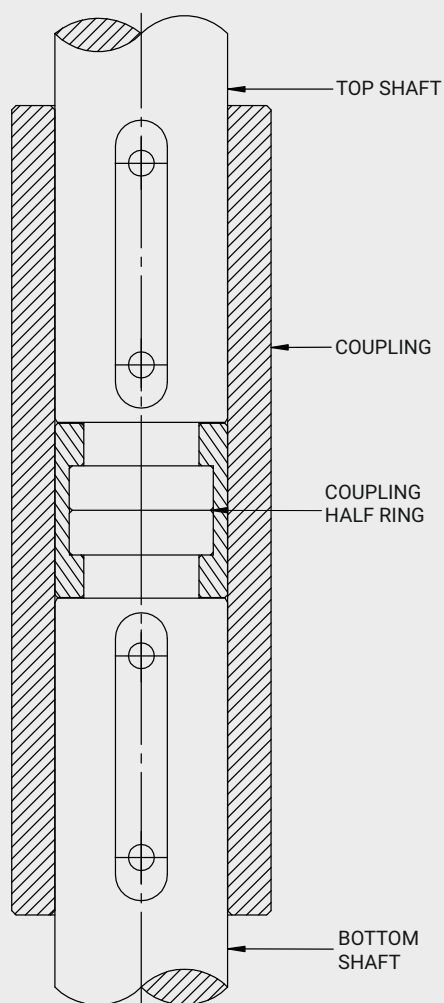


MUFF COUPLING

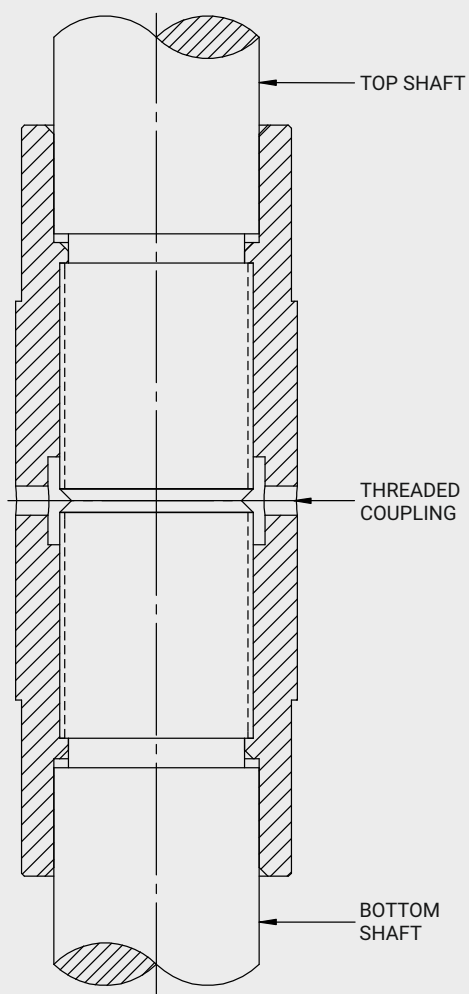


THREADED COUPLING

THRUST BEARING WITH RATCHET ARRANGEMENT

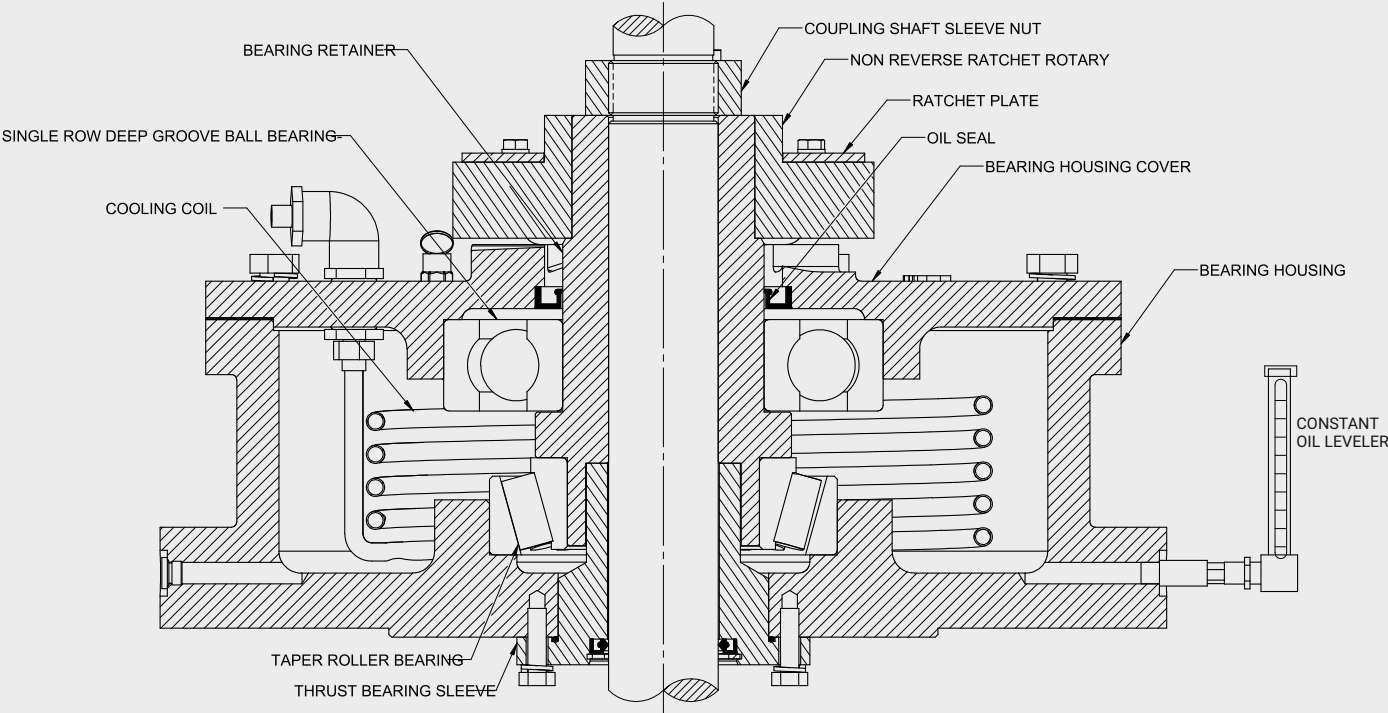


THRUST BEARING ASSEMBLY WITH RATCHET ARRANGEMENT - ANTIFRICTION BEARING


LUBRICATION ARRANGEMENT

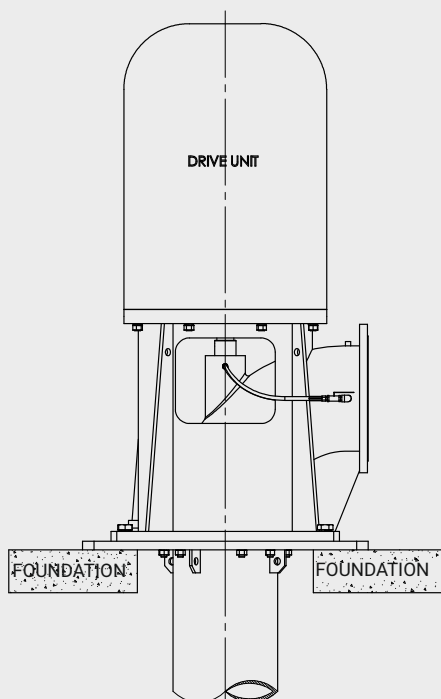

SELF WATER LUBRICATION

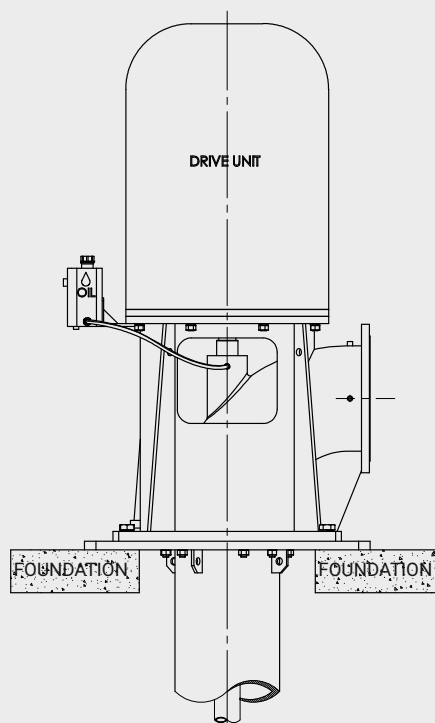


OIL LUBRICATION

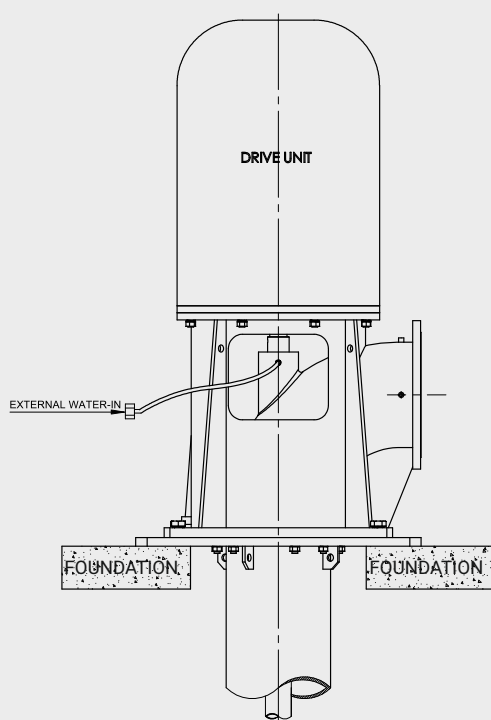


EXTERNAL CLEAR WATER LUBRICATION

DISCHARGE HEAD WITH ABOVE GROUND LEVEL ARRANGEMENT

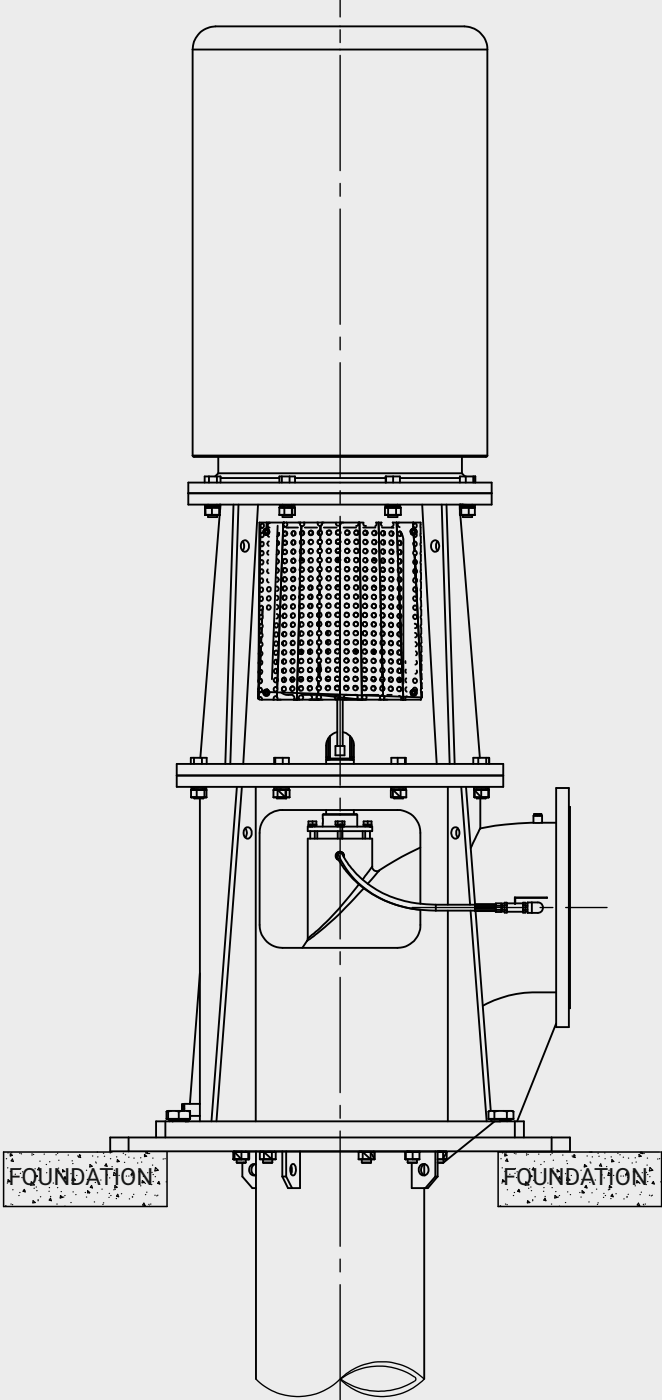

ABOVE GROUND LEVEL ARRANGEMENT
DISCHARGE HEAD - MOTOR DRIVEN

GENERAL ARRANGEMENT DRAWING (GAD) WITH SOLID SHAFT MOTOR

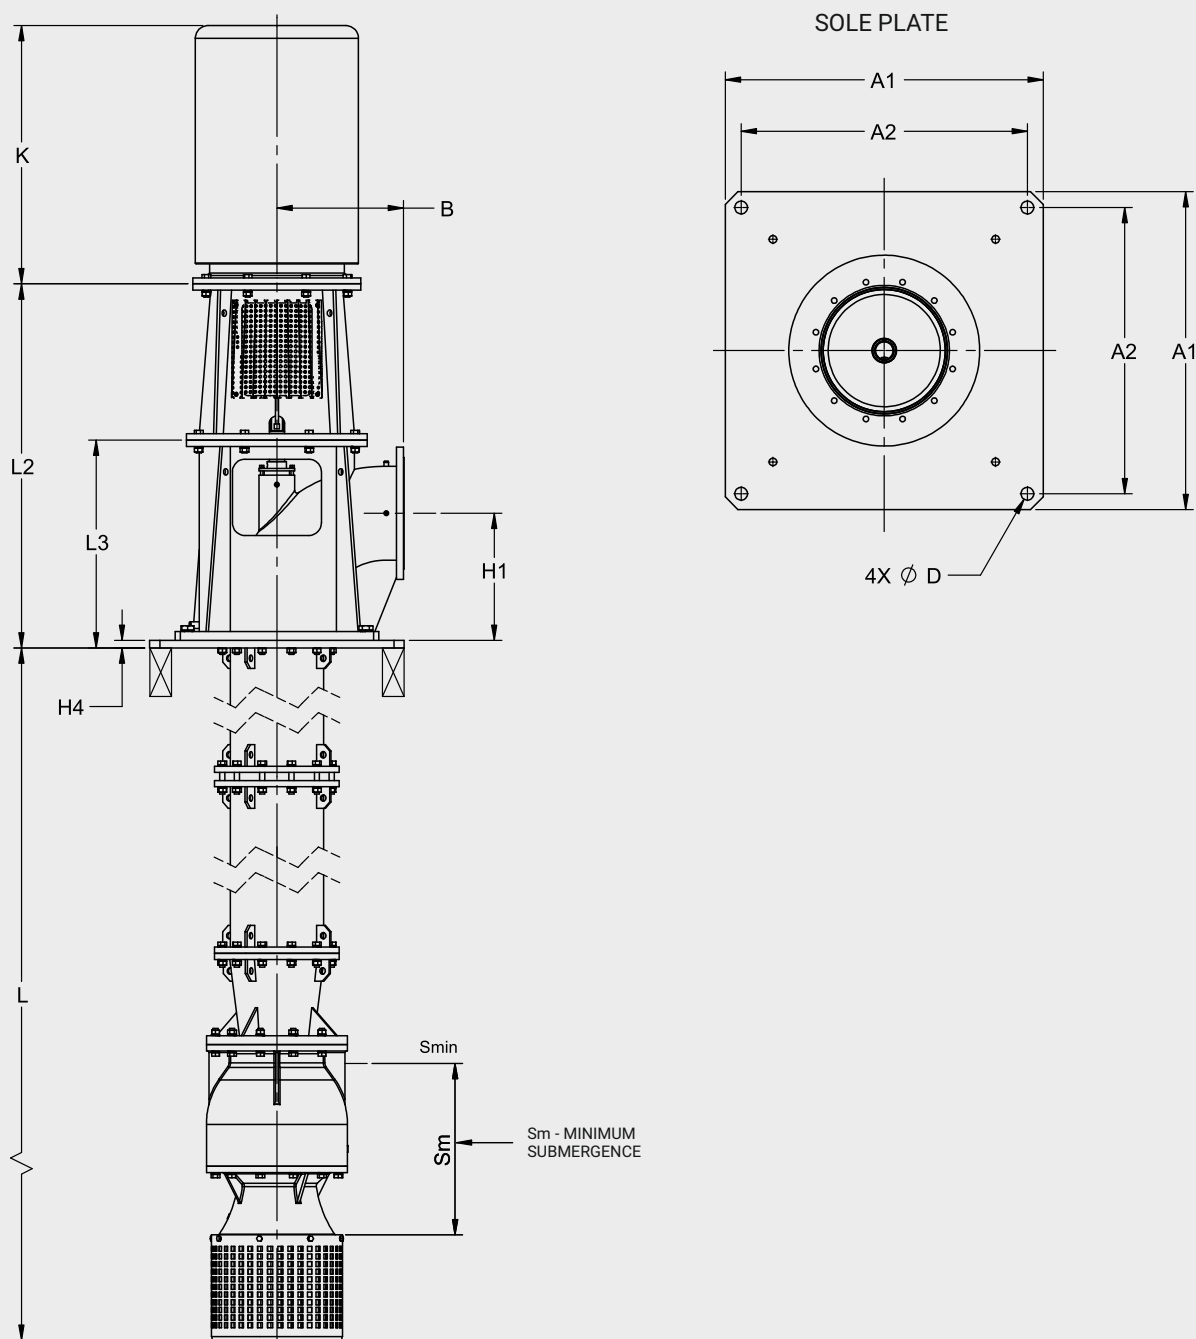


GENERAL DIMENSIONS & MOUNTING DETAILS FOR SOLID SHAFT MOTOR

MODEL	DN	A1	A2	n- ØD	H1	H4	B	Sm	L2	L3
FVTP - 40*	150	520	430	4 - 30	175	25	260	295	800	405
FVTP - 70*	150	520	430	4 - 30	175	25	260	330	800	405
FVTP - 115	150	520	430	4 - 30	175	25	260	380	800	405
FVTP - 170	150	520	430	4 - 30	175	25	260	485	850	405
FVTP - 270	200	560	450	4 - 30	200	25	280	535	910	445
FVTP - 400	200	560	450	4 - 30	200	25	280	585	940	445
FVTP - 500	250	560	450	4 - 30	250	30	350	635	1165	515
FVTP - 700	250	560	450	4 - 30	250	30	350	740	1165	515
FVTP - 1000	300	750	650	4 - 40	300	30	375	840	1300	746
FVTP - 1600	350	750	650	4 - 40	350	35	375	1040	1350	788
FVTP - 2300	450	900	750	4 - 40	450	35	500	1245	1350	800
FVTP - 3300	500	1300	1200	8 - 40	560	35	630	1425	1552	958
FVTP - 4500	700	1700	1500	8 - 40	770	40	850	1700	2089	1420
FVTP - 5500	700	1700	1500	8 - 40	770	40	850	1855	1923	1268
FVTP - 5600	700	1700	1500	8 - 40	770	40	850	1855	1923	1268
FVTP - 7300	800	1800	1650	8 - 40	870	40	900	2085	2071	1418
FVTP - 7400	800	1800	1650	8 - 40	870	40	900	2085	2071	1418
FVTP - 9500	900	2000	1840	8 - 40	970	40	950	2340	2610	1640

* on request basis.

Note : All Dimensions are in mm, Unless Otherwise Specified

GENERAL ARRANGEMENT DRAWING (GAD) WITH VERTICAL HOLLOW SHAFT MOTOR

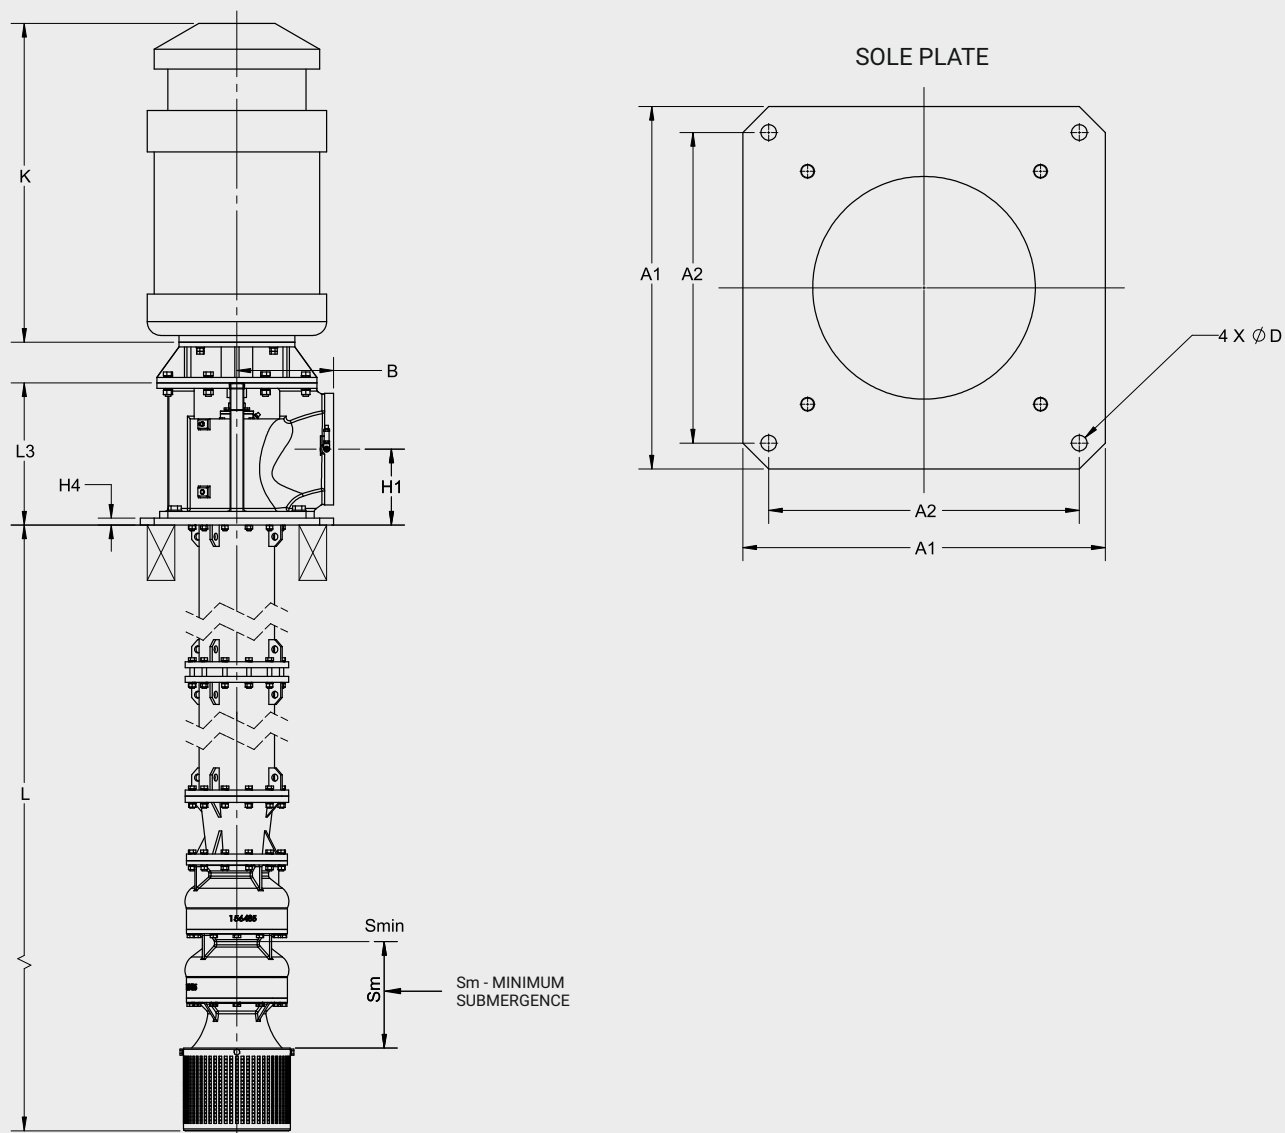


GENERAL DIMENSIONS & MOUNTING DETAILS FOR VERTICAL HOLLOW SHAFT MOTOR

MODEL	DN	A1	A2	n - ØD	H1	H4	B	Sm	L3
FVTP - 40*	150	520	430	4 - 30	175	25	260	295	405
FVTP - 70*	150	520	430	4 - 30	175	25	260	330	405
FVTP - 115	150	520	430	4 - 30	175	25	260	380	405
FVTP - 170	150	520	430	4 - 30	175	25	260	485	405
FVTP - 270	200	560	450	4 - 30	200	25	280	535	445
FVTP - 400	200	560	450	4 - 30	200	25	280	585	445
FVTP - 500	250	560	450	4 - 30	250	30	350	635	515
FVTP - 700	250	560	450	4 - 30	250	30	350	740	515
FVTP - 1000	300	750	650	4 - 40	300	30	375	840	746
FVTP - 1600	350	750	650	4 - 40	350	35	375	1040	788
FVTP - 2300	450	900	750	4 - 40	450	35	500	1245	800
FVTP - 3300	500	1300	1200	8 - 40	560	35	630	1425	958
FVTP - 4500	700	1700	1500	8 - 40	770	40	850	1700	1420
FVTP - 5500	700	1700	1500	8 - 40	770	40	850	1855	1268
FVTP - 5600	700	1700	1500	8 - 40	770	40	850	1855	1268
FVTP - 7300	800	1800	1650	8 - 40	870	40	900	2085	1418
FVTP - 7400	800	1800	1650	8 - 40	870	40	900	2085	1418
FVTP - 9500	900	2000	1840	8 - 40	970	40	950	2340	1640

* on request basis.

Note : All Dimensions are in mm, Unless Otherwise Specified


ENGINE DRIVEN PUMP WITH RIGHT ANGLE GEAR BOX

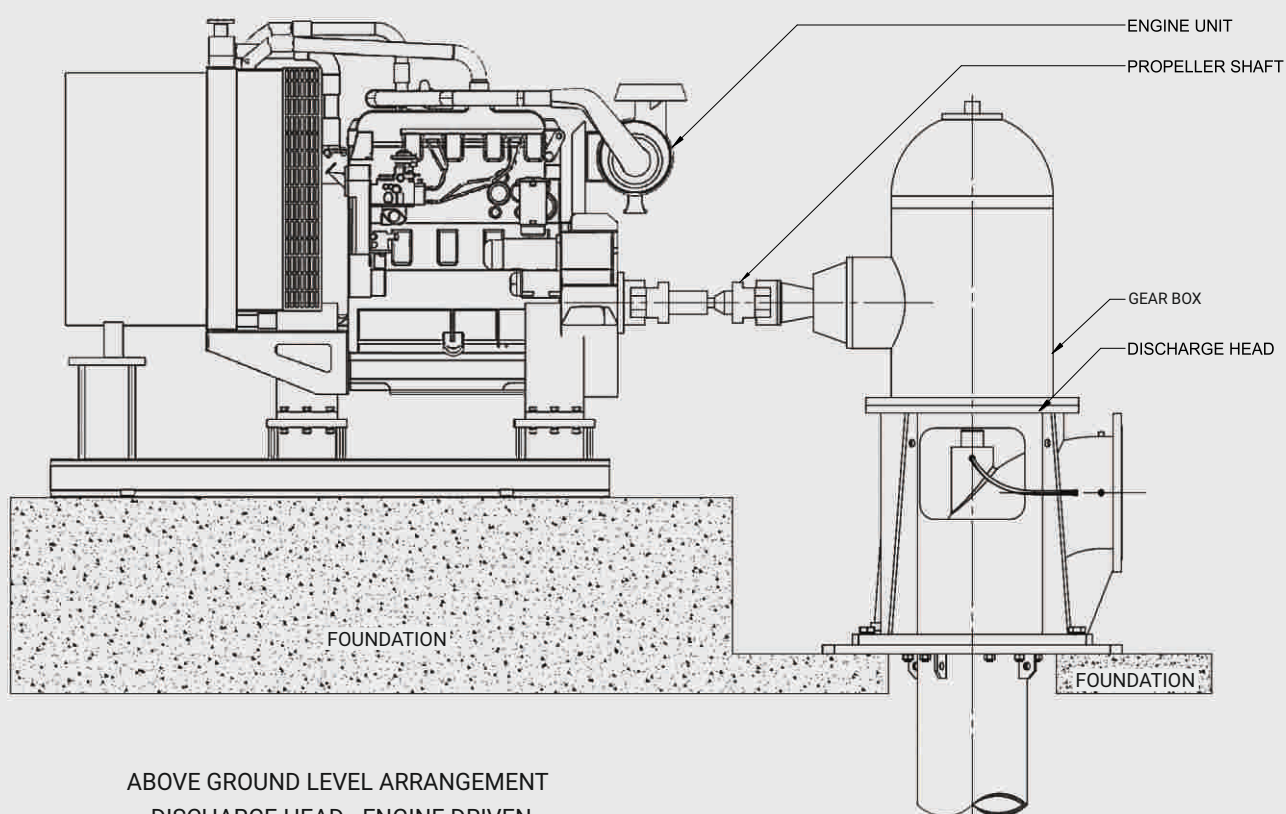

PERFORMANCE CURVES

FVTP - 115

Speed 1450 rpm

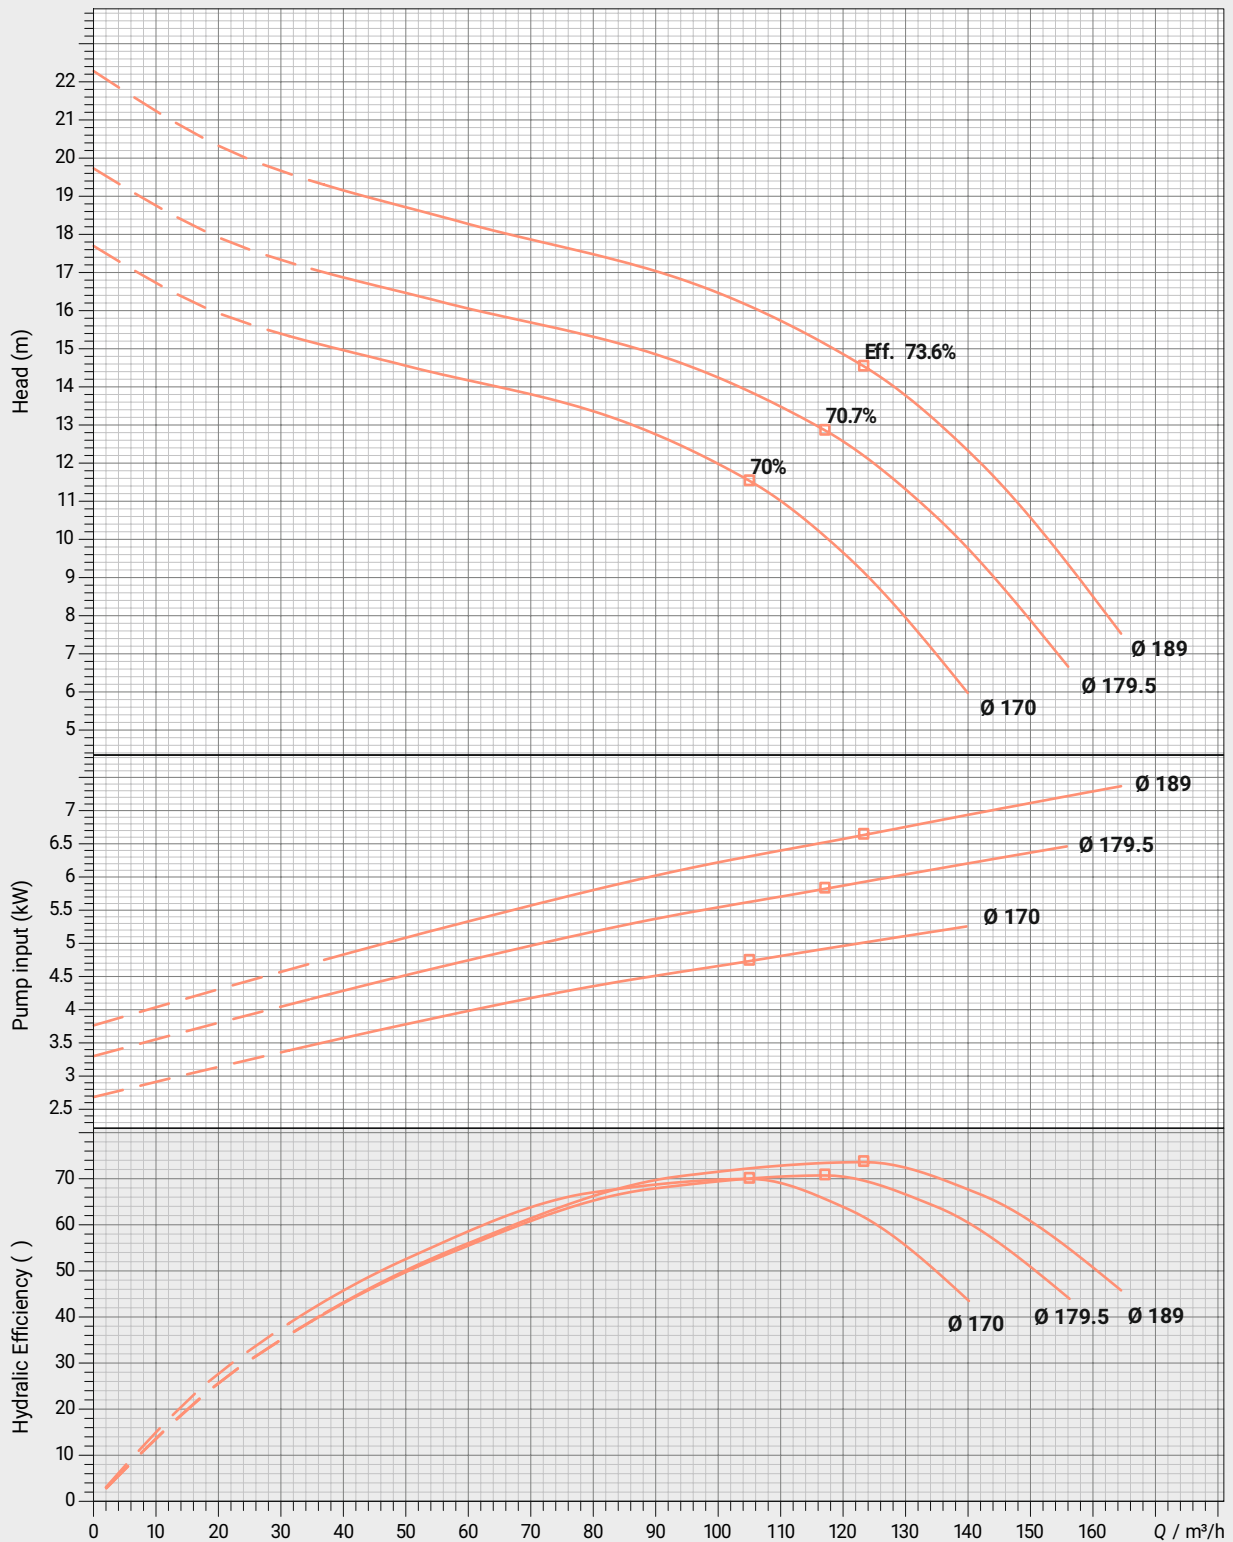

* This pump can be supplied max. 20 stages.


Performance curve tolerances are as per HI : 14.6 / ISO: 9906, Grade 2B

In view of continuous developments the information / performance / descriptions / specifications / illustrations are subject to change without notice

PERFORMANCE CURVES

FVTP - 170

Speed 1450 rpm

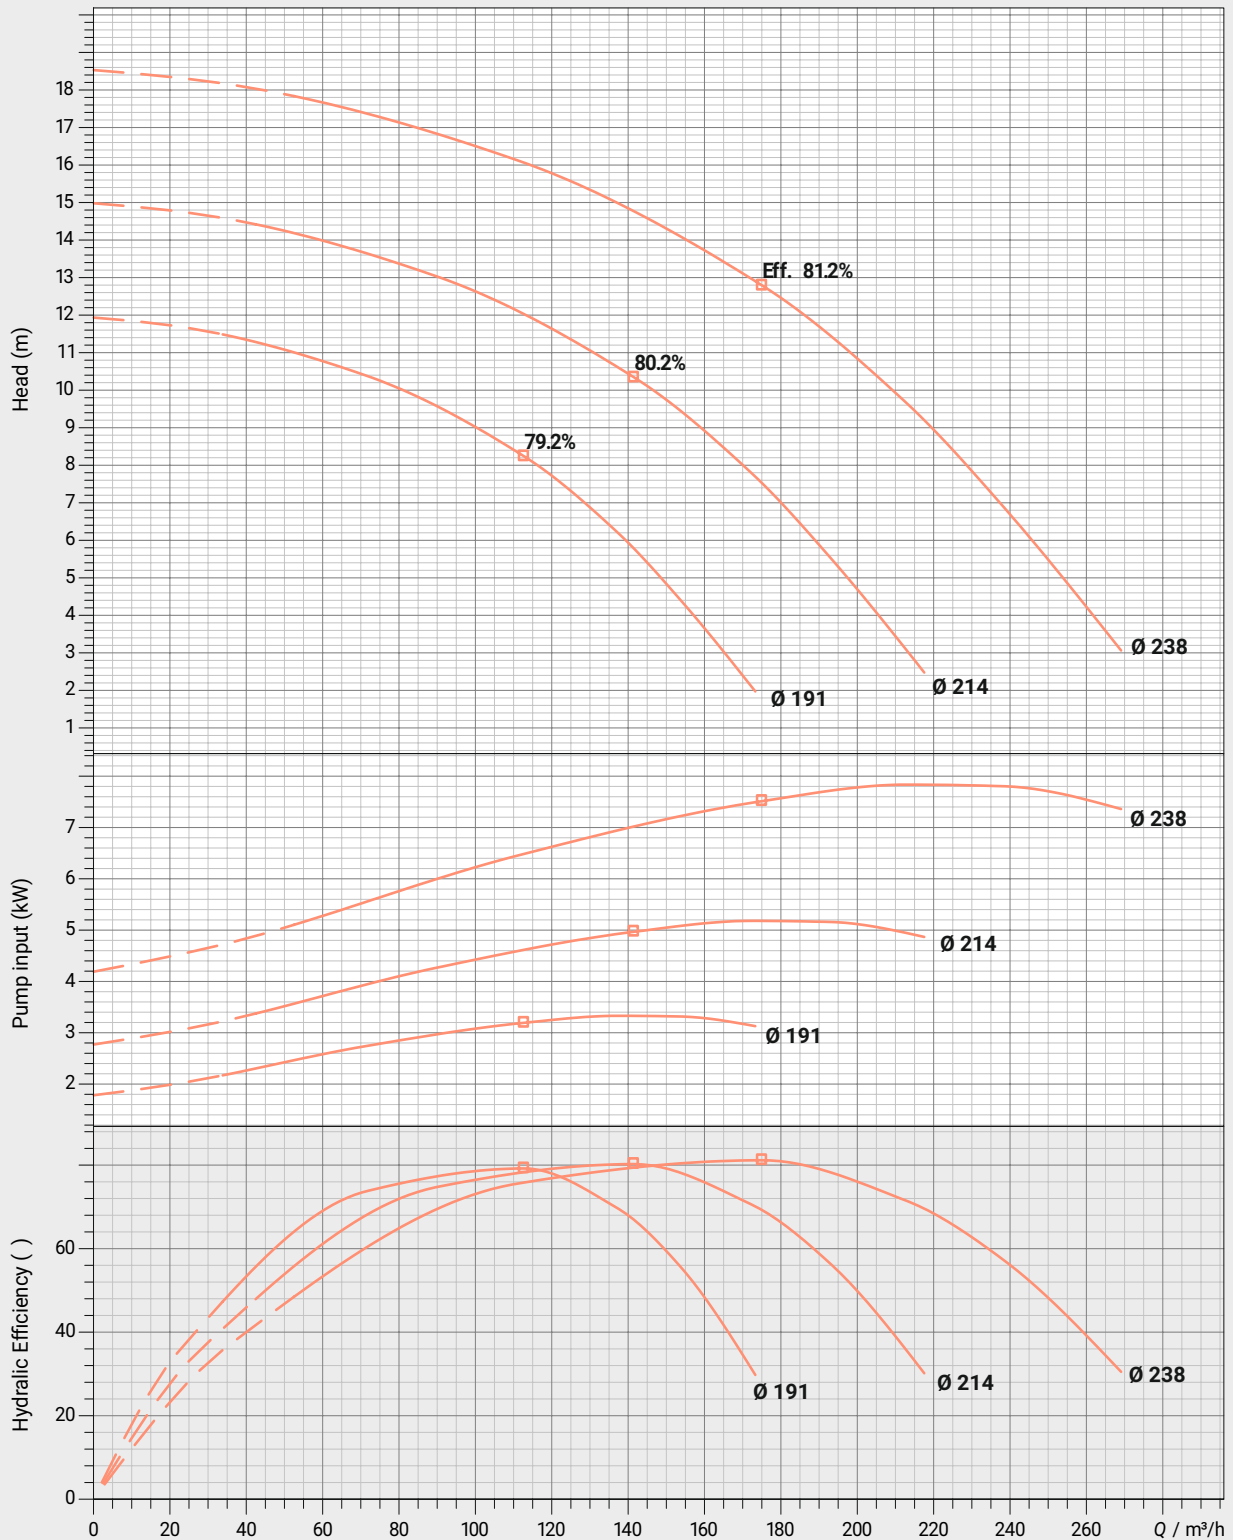

* This pump can be supplied max. 12 stages.


Performance curve tolerances are as per HI : 14.6 / ISO: 9906, Grade 2B

In view of continuous developments the information / performance / descriptions / specifications / illustrations are subject to change without notice

PERFORMANCE CURVES

FVTP - 270

Speed 1450 rpm

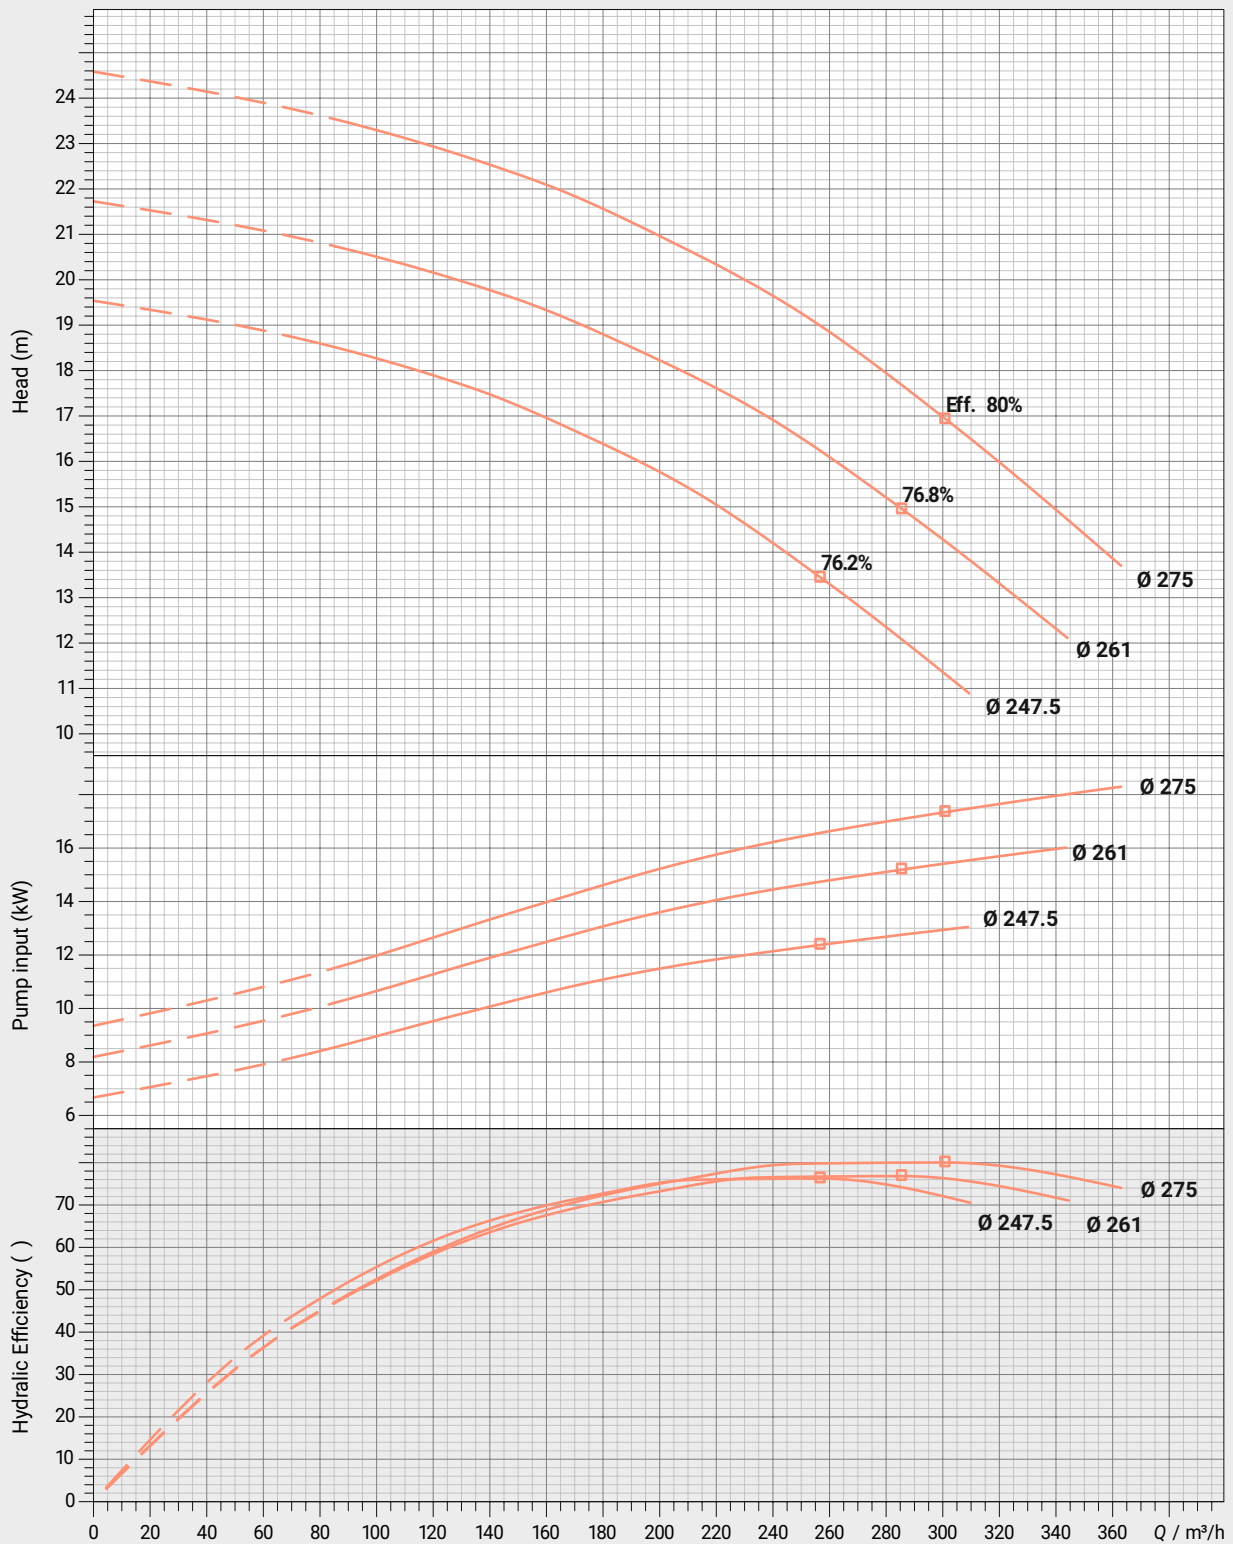

* This pump can be supplied max. 10 stages.


Performance curve tolerances are as per HI : 14.6 / ISO: 9906, Grade 2B

In view of continuous developments the information / performance / descriptions / specifications / illustrations are subject to change without notice

PERFORMANCE CURVES

FVTP - 400

Speed 1450 rpm

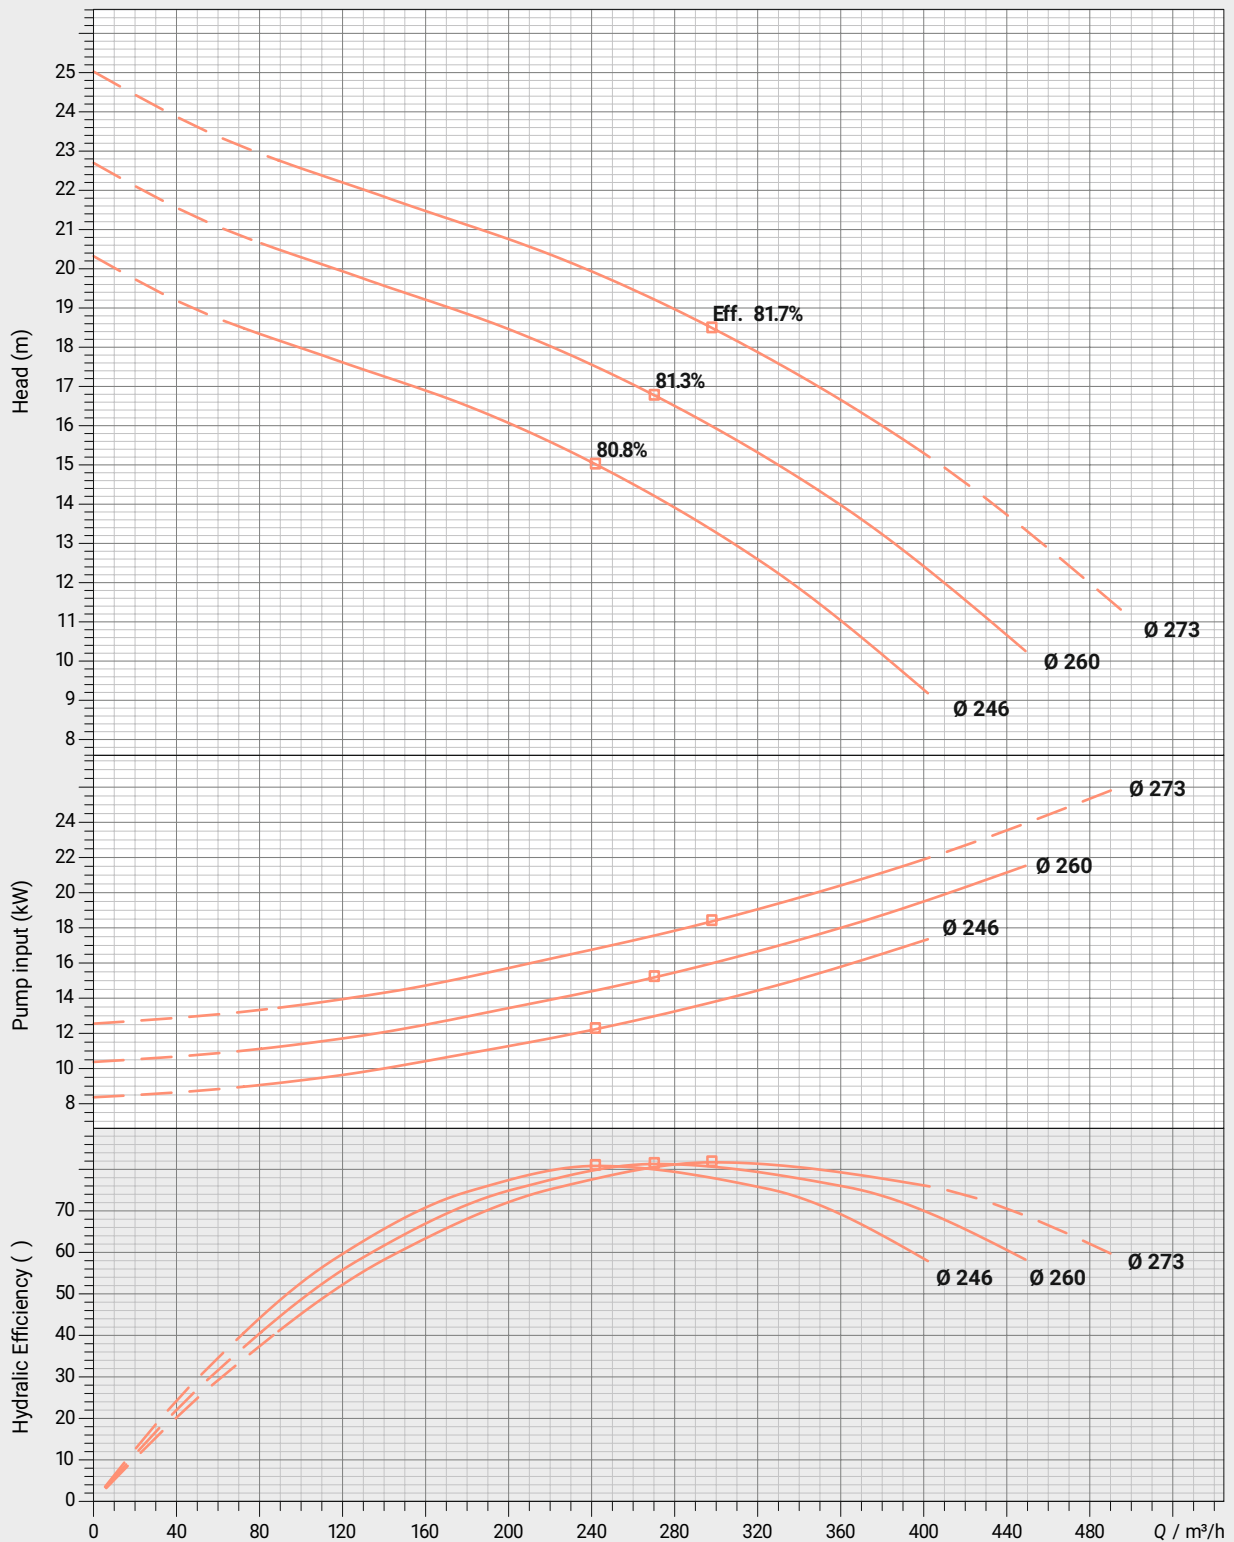

* This pump can be supplied max. 10 stages.


Performance curve tolerances are as per HI : 14.6 / ISO: 9906, Grade 2B

In view of continuous developments the information / performance / descriptions / specifications / illustrations are subject to change without notice

PERFORMANCE CURVES

FVTP - 500

Speed 1450 rpm

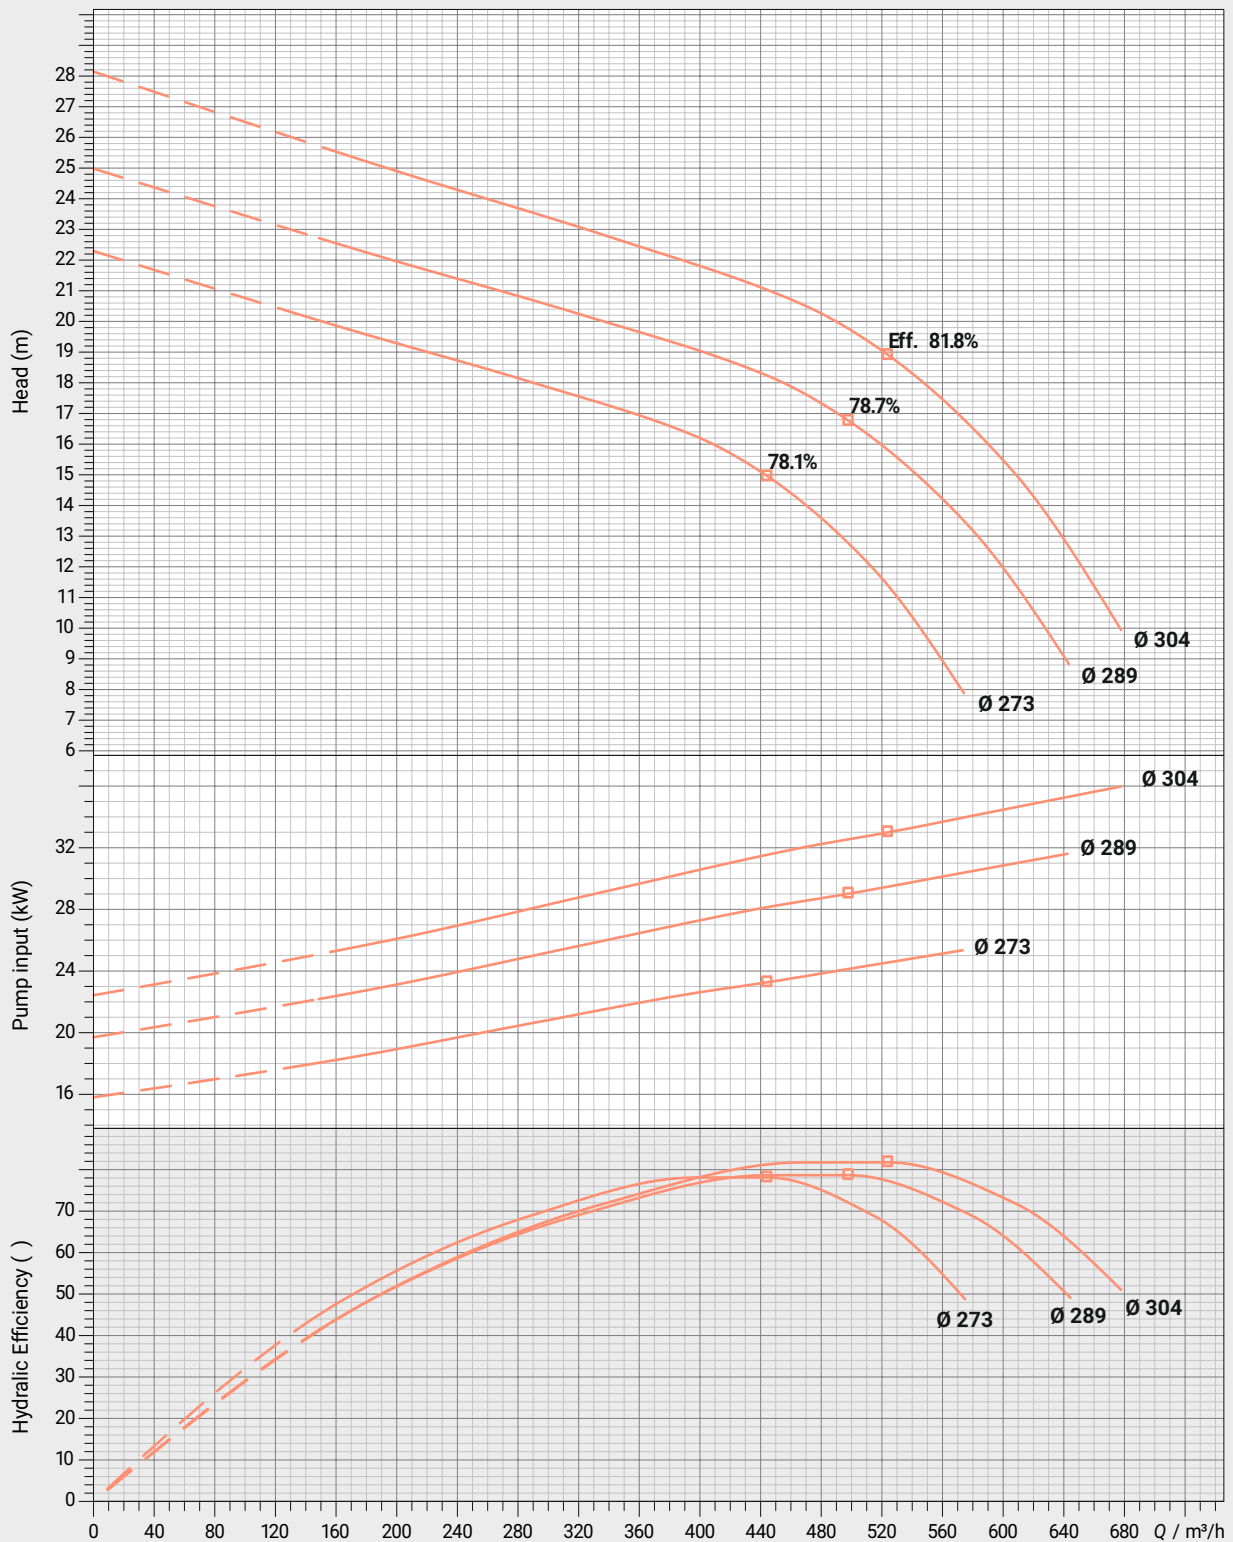

* This pump can be supplied max. 10 stages.


Performance curve tolerances are as per HI : 14.6 / ISO: 9906, Grade 2B

In view of continuous developments the information / performance / descriptions / specifications / illustrations are subject to change without notice

PERFORMANCE CURVES

FVTP - 700

Speed 1450 rpm

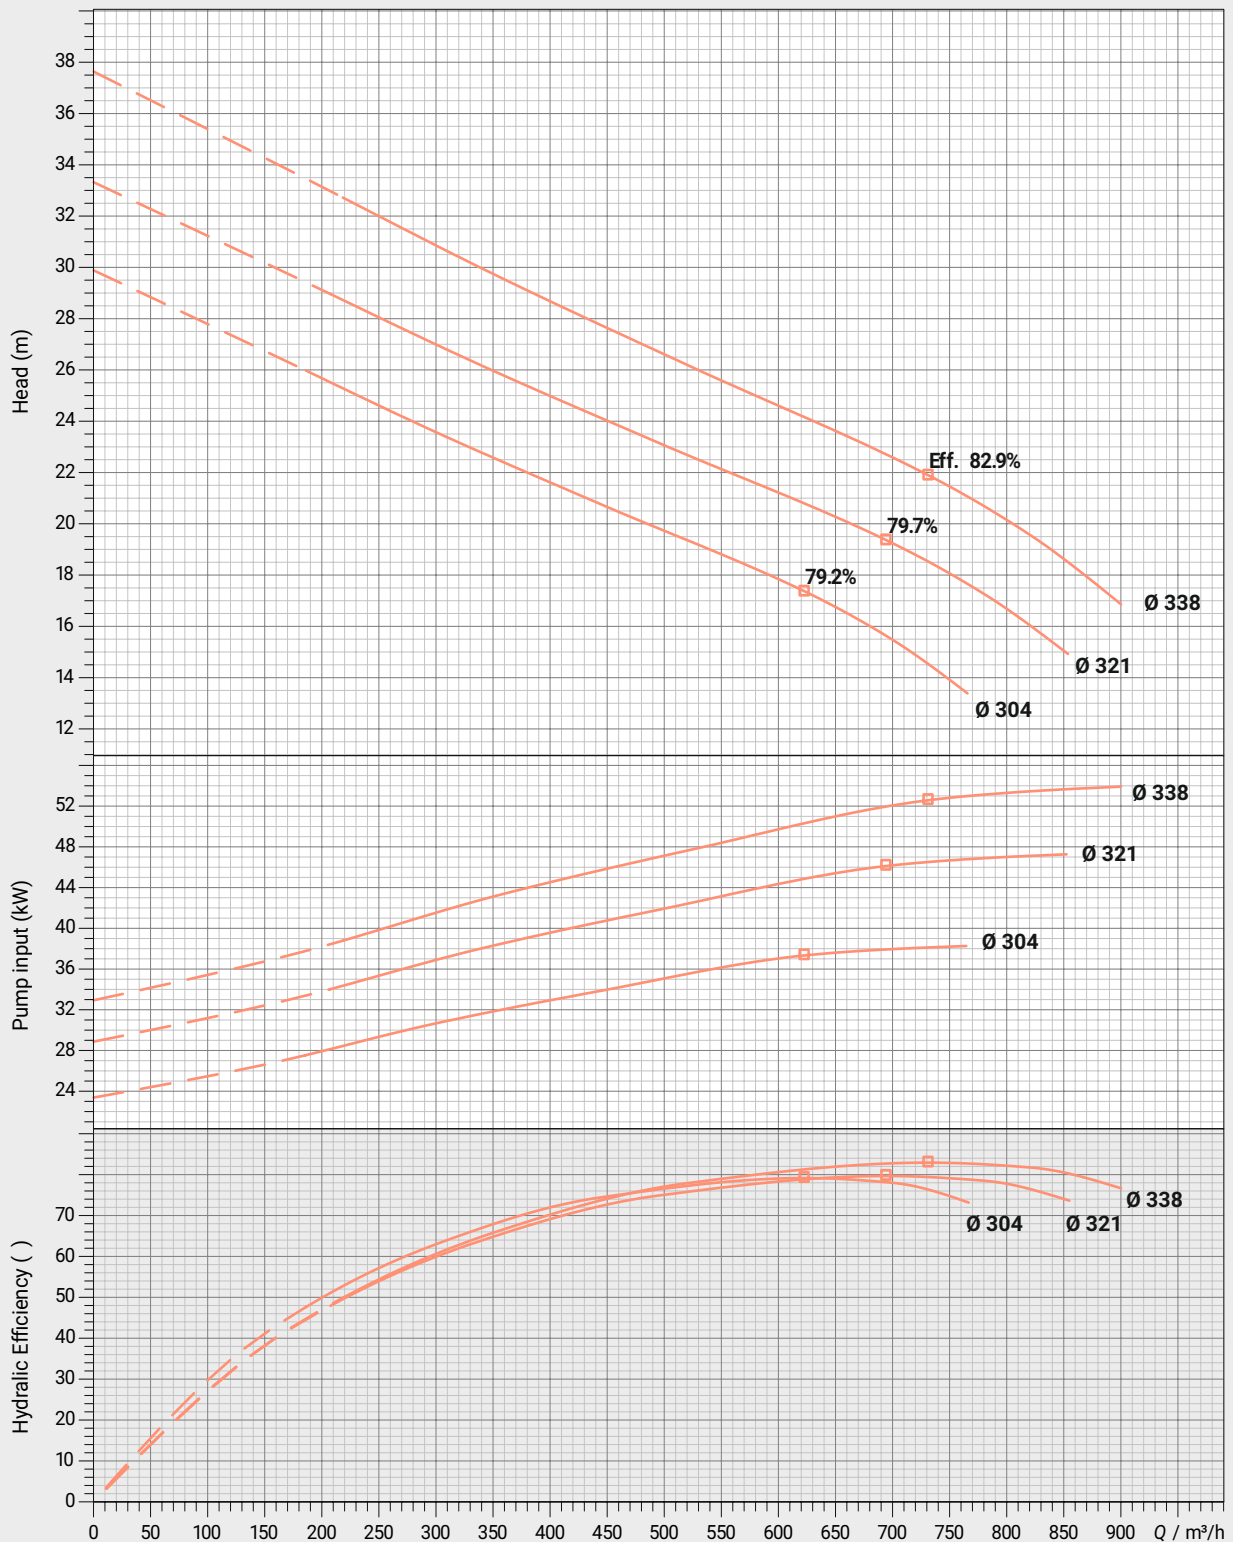

* This pump can be supplied max. 7 stages.


Performance curve tolerances are as per HI : 14.6 / ISO: 9906, Grade 2B

In view of continuous developments the information / performance / descriptions / specifications / illustrations are subject to change without notice

PERFORMANCE CURVES

FVTP - 1000

Speed 1450 rpm

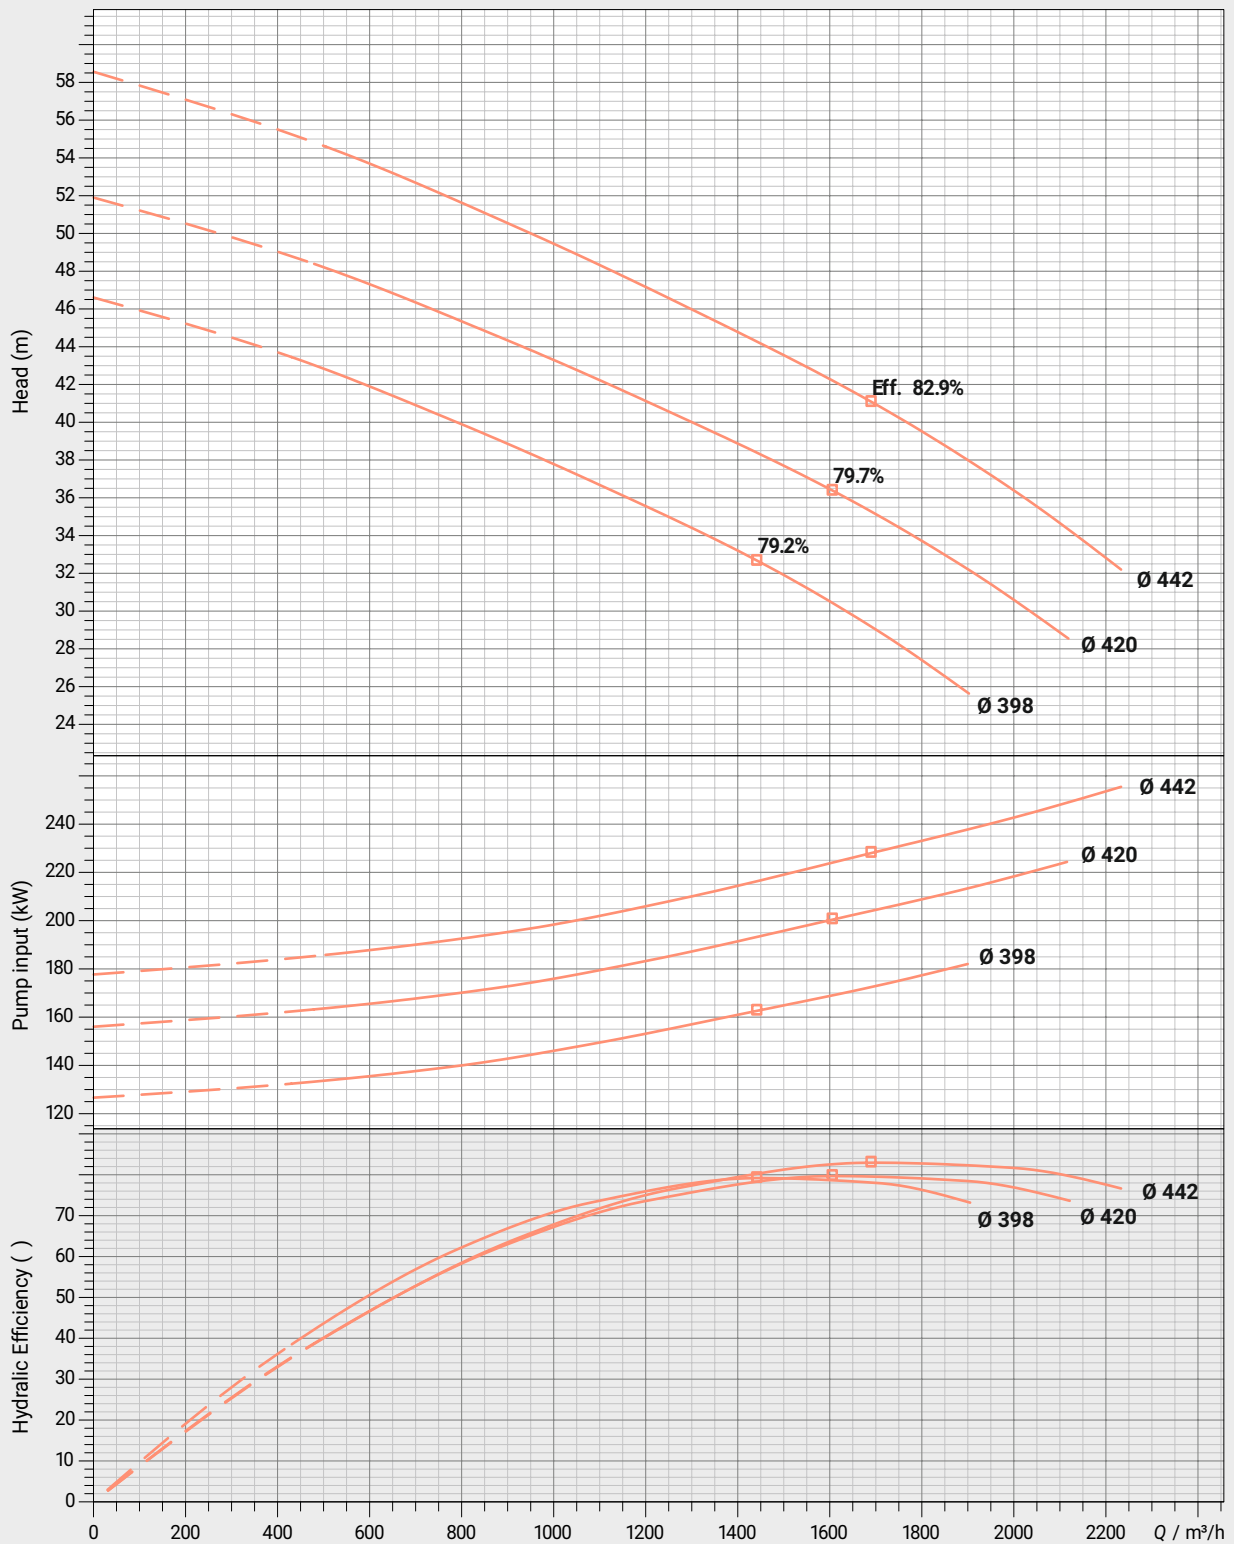

* This pump can be supplied max. 5 stages.


Performance curve tolerances are as per HI : 14.6 / ISO: 9906, Grade 2B

In view of continuous developments the information / performance / descriptions / specifications / illustrations are subject to change without notice

PERFORMANCE CURVES

FVTP - 1600

Speed 1450 rpm

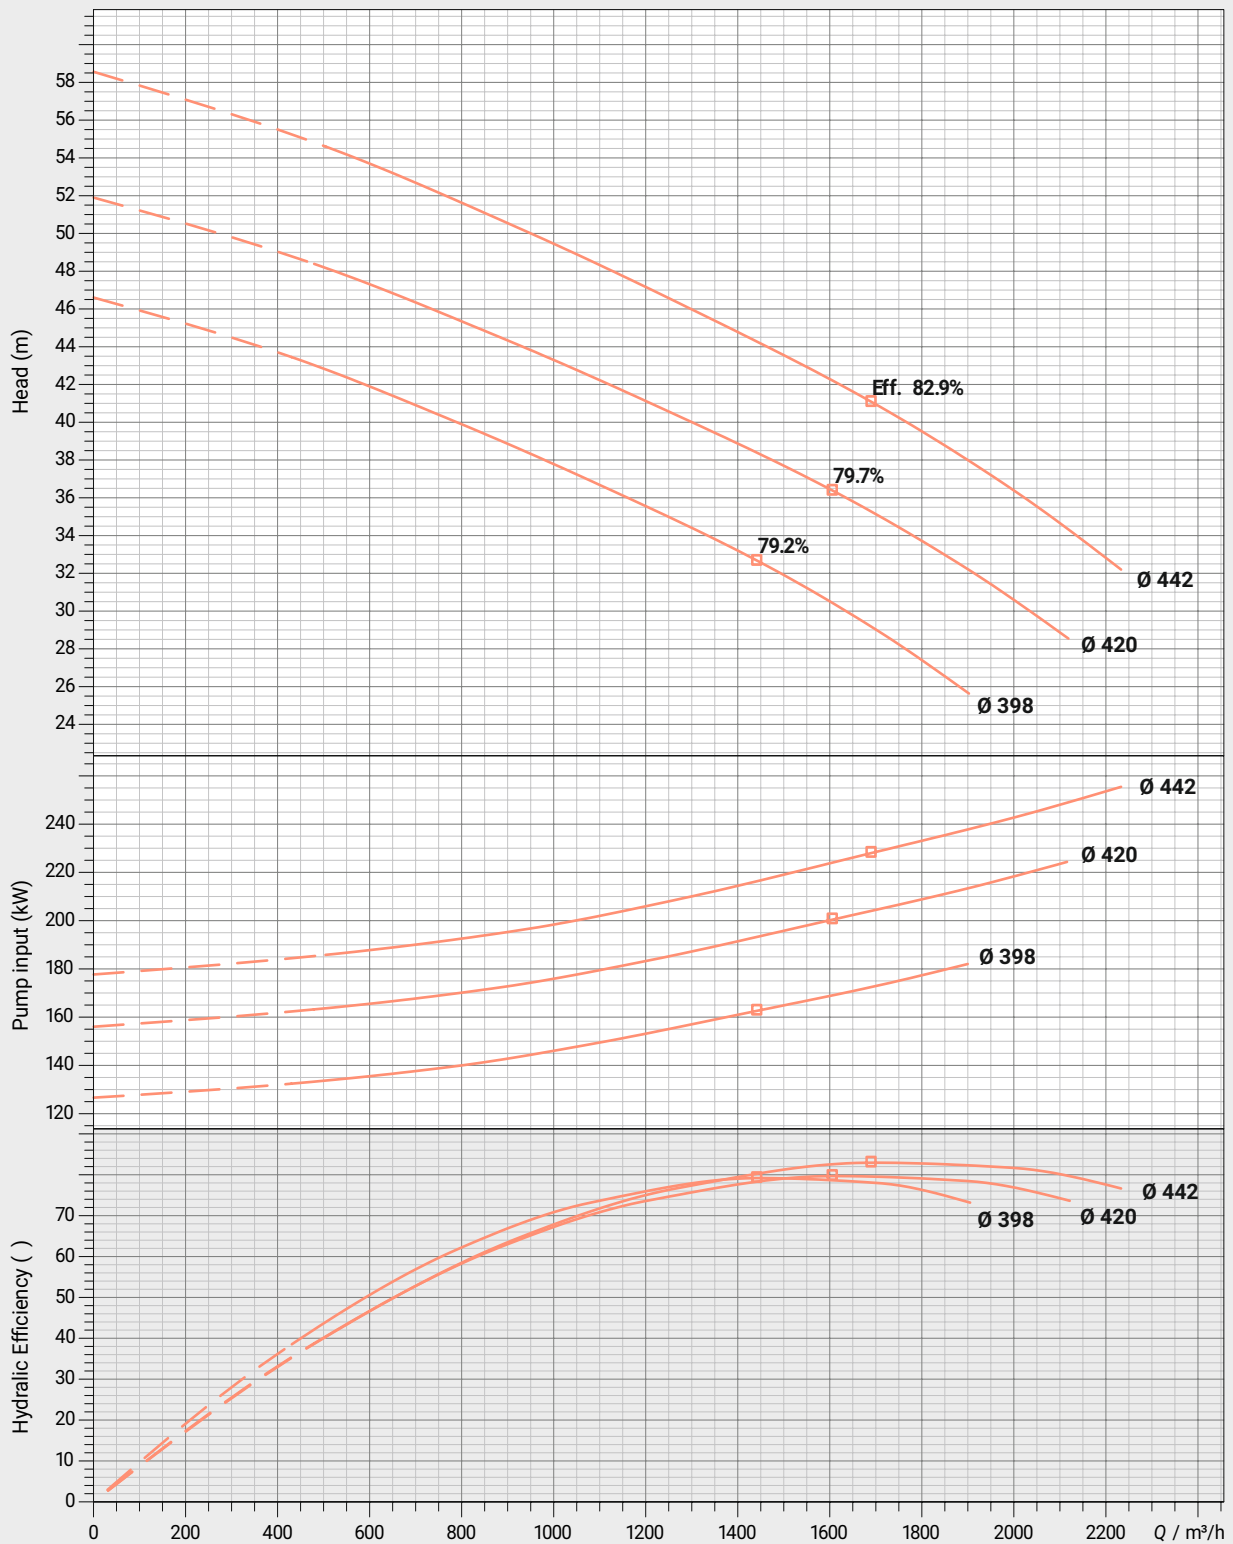

* This pump can be supplied max. 2 stages.


Performance curve tolerances are as per HI : 14.6 / ISO: 9906, Grade 2B

In view of continuous developments the information / performance / descriptions / specifications / illustrations are subject to change without notice

PERFORMANCE CURVES

FVTP - 2300

Speed 1450 rpm

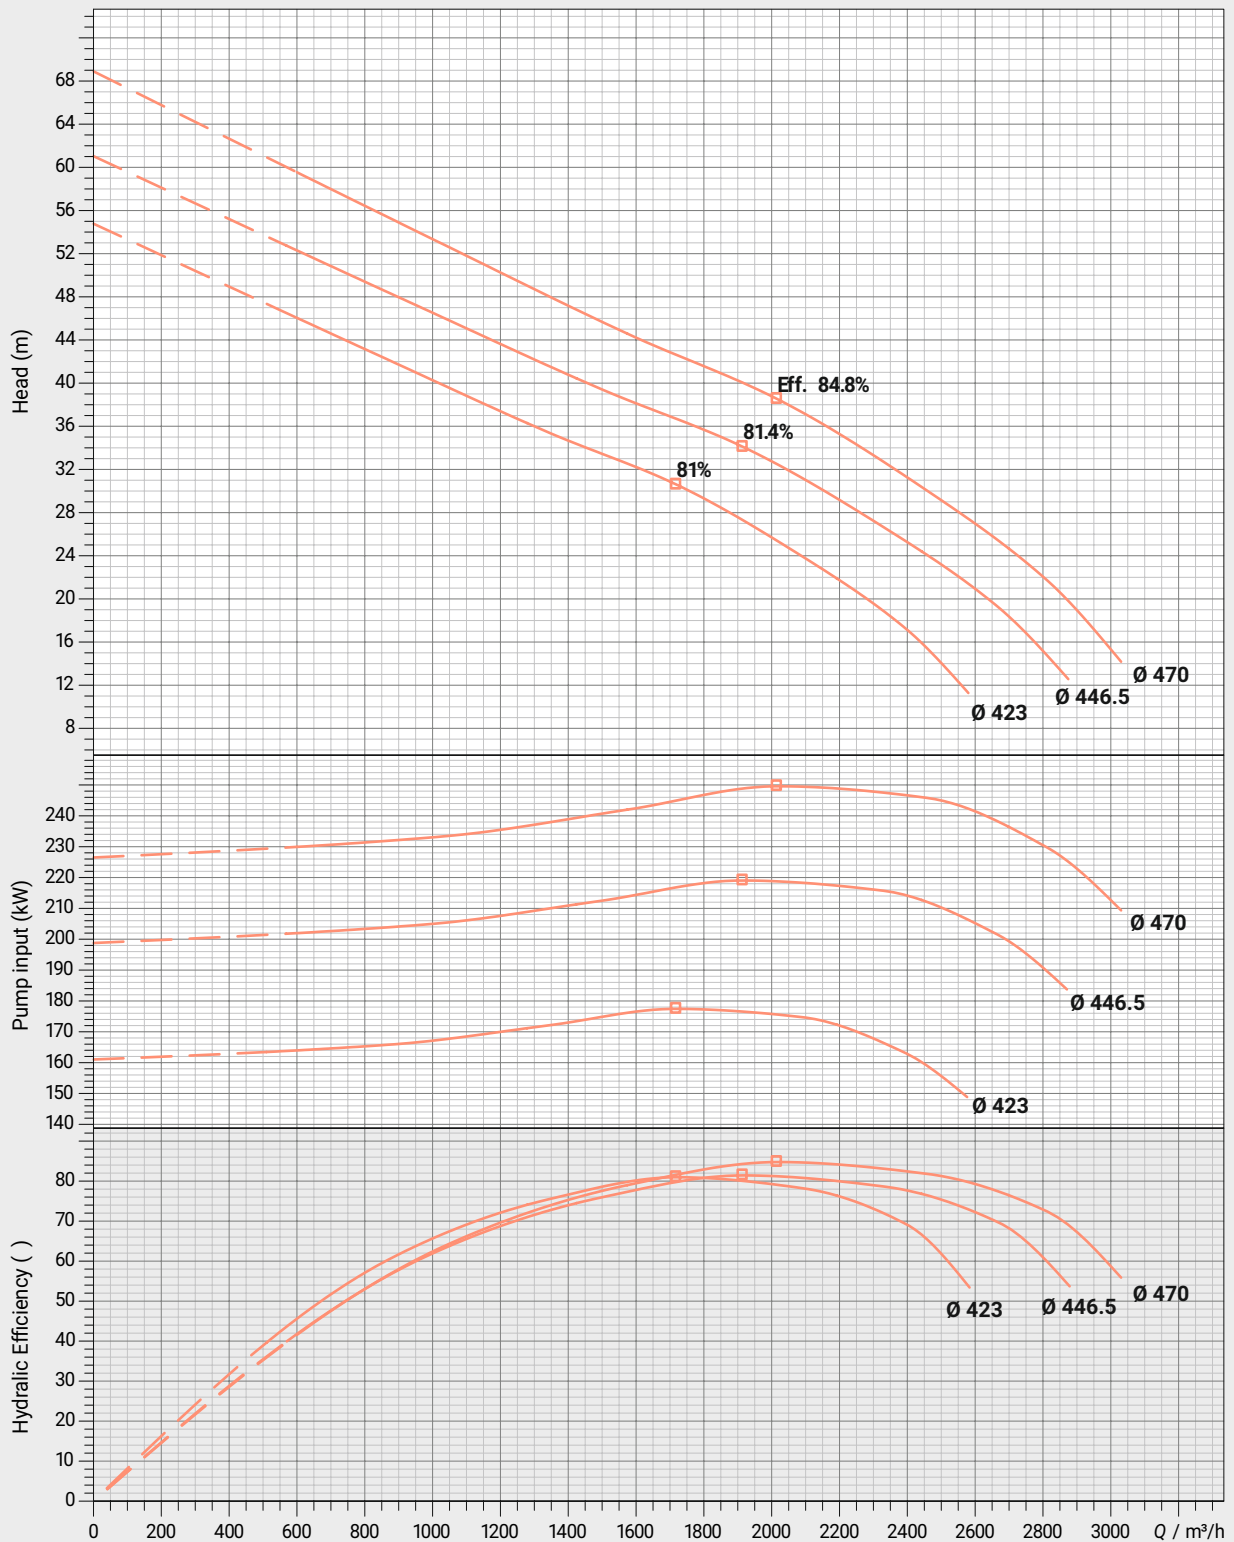

* This pump can be supplied max. 2 stages.


Performance curve tolerances are as per HI : 14.6 / ISO: 9906, Grade 2B

In view of continuous developments the information / performance / descriptions / specifications / illustrations are subject to change without notice

PERFORMANCE CURVES

FVTP - 3300

Speed 1450 rpm

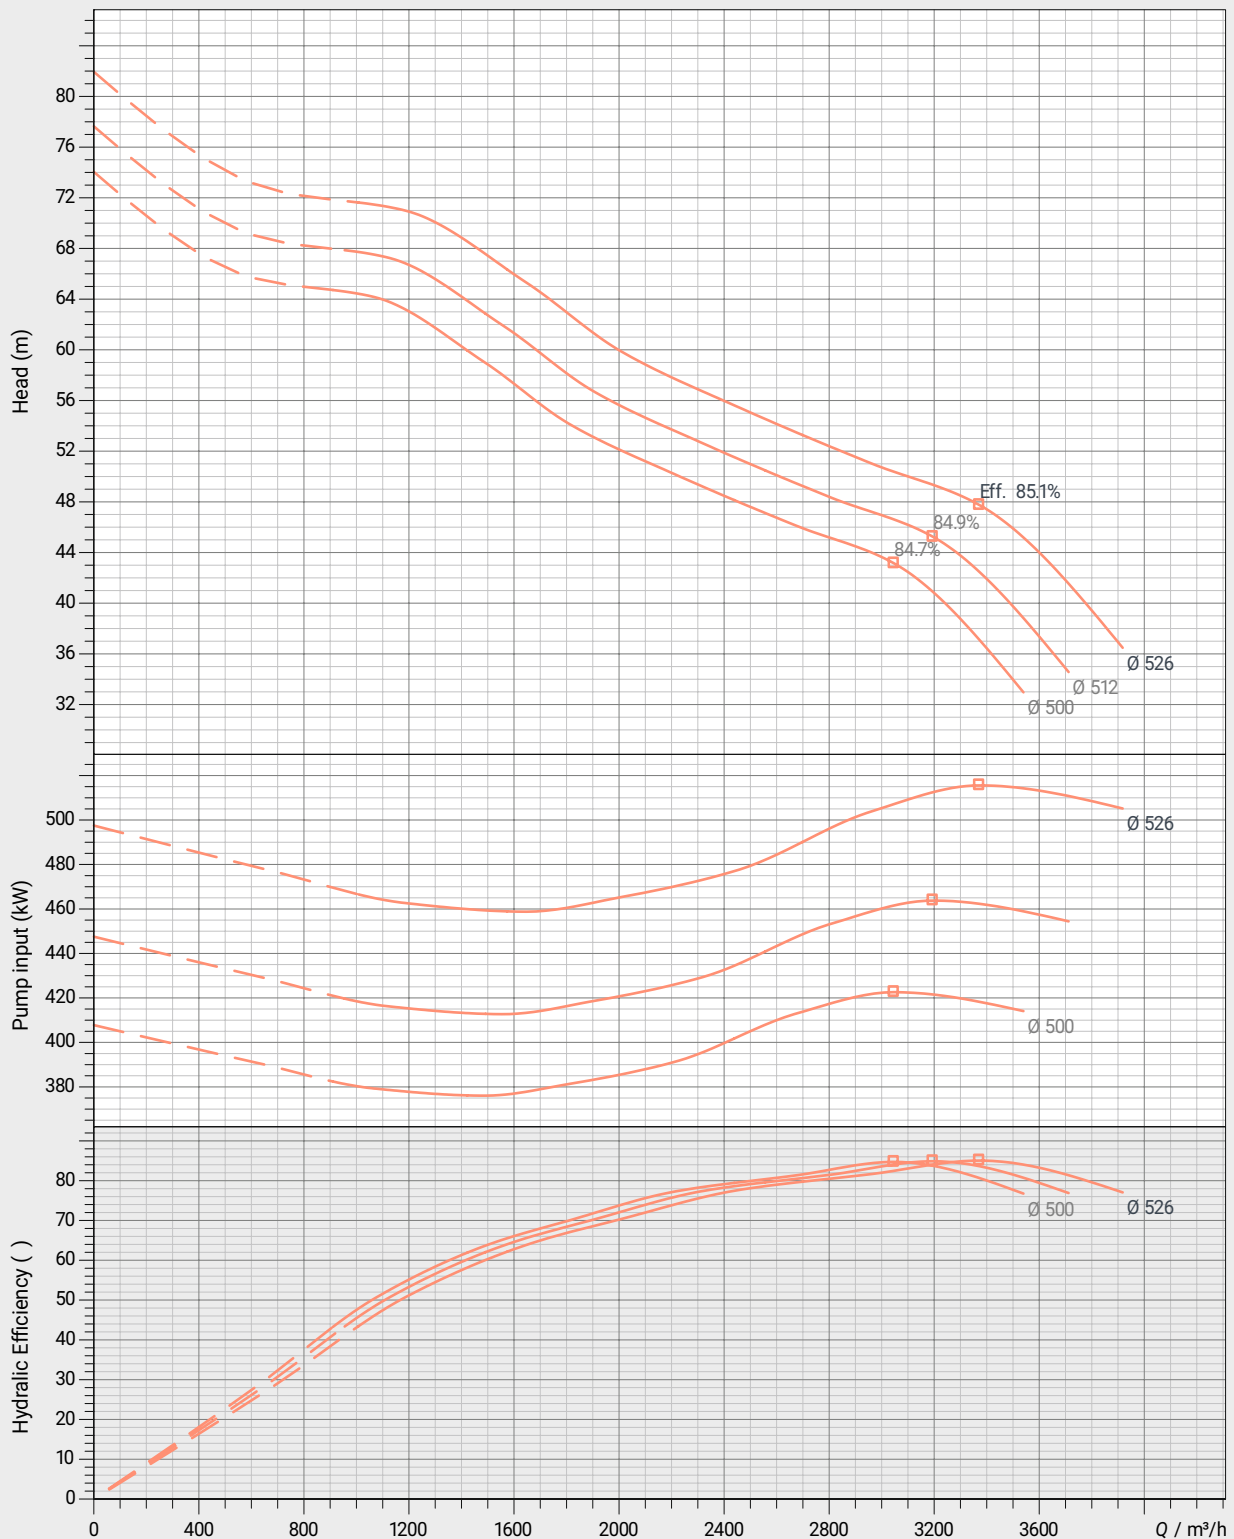

* This pump can be supplied max. 2 stages.


Performance curve tolerances are as per HI : 14.6 / ISO: 9906, Grade 2B

In view of continuous developments the information / performance / descriptions / specifications / illustrations are subject to change without notice

PERFORMANCE CURVES

FVTP - 4500

Speed 980 rpm

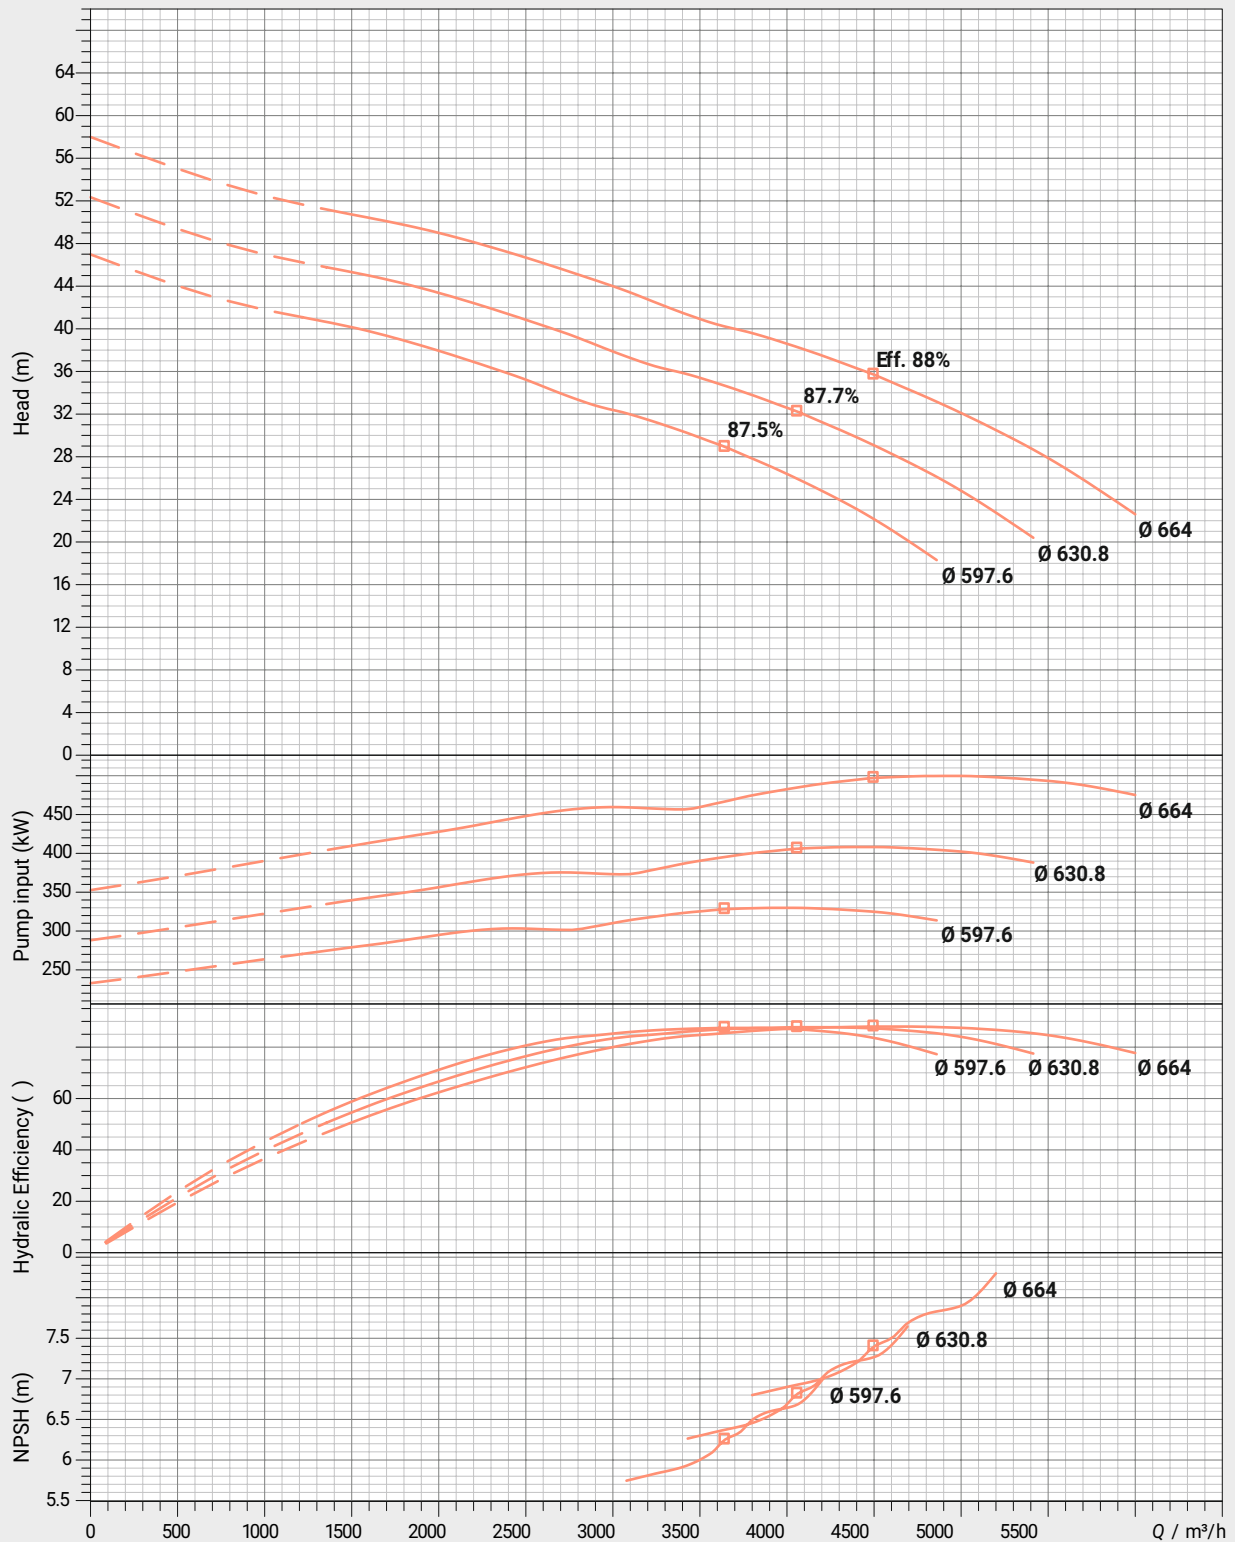

* This pump can be supplied max. 1 stage.


Performance curve tolerances are as per HI : 14.6 / ISO: 9906, Grade 2B

In view of continuous developments the information / performance / descriptions / specifications / illustrations are subject to change without notice

PERFORMANCE CURVES

FVTP - 5500

Speed 730 rpm

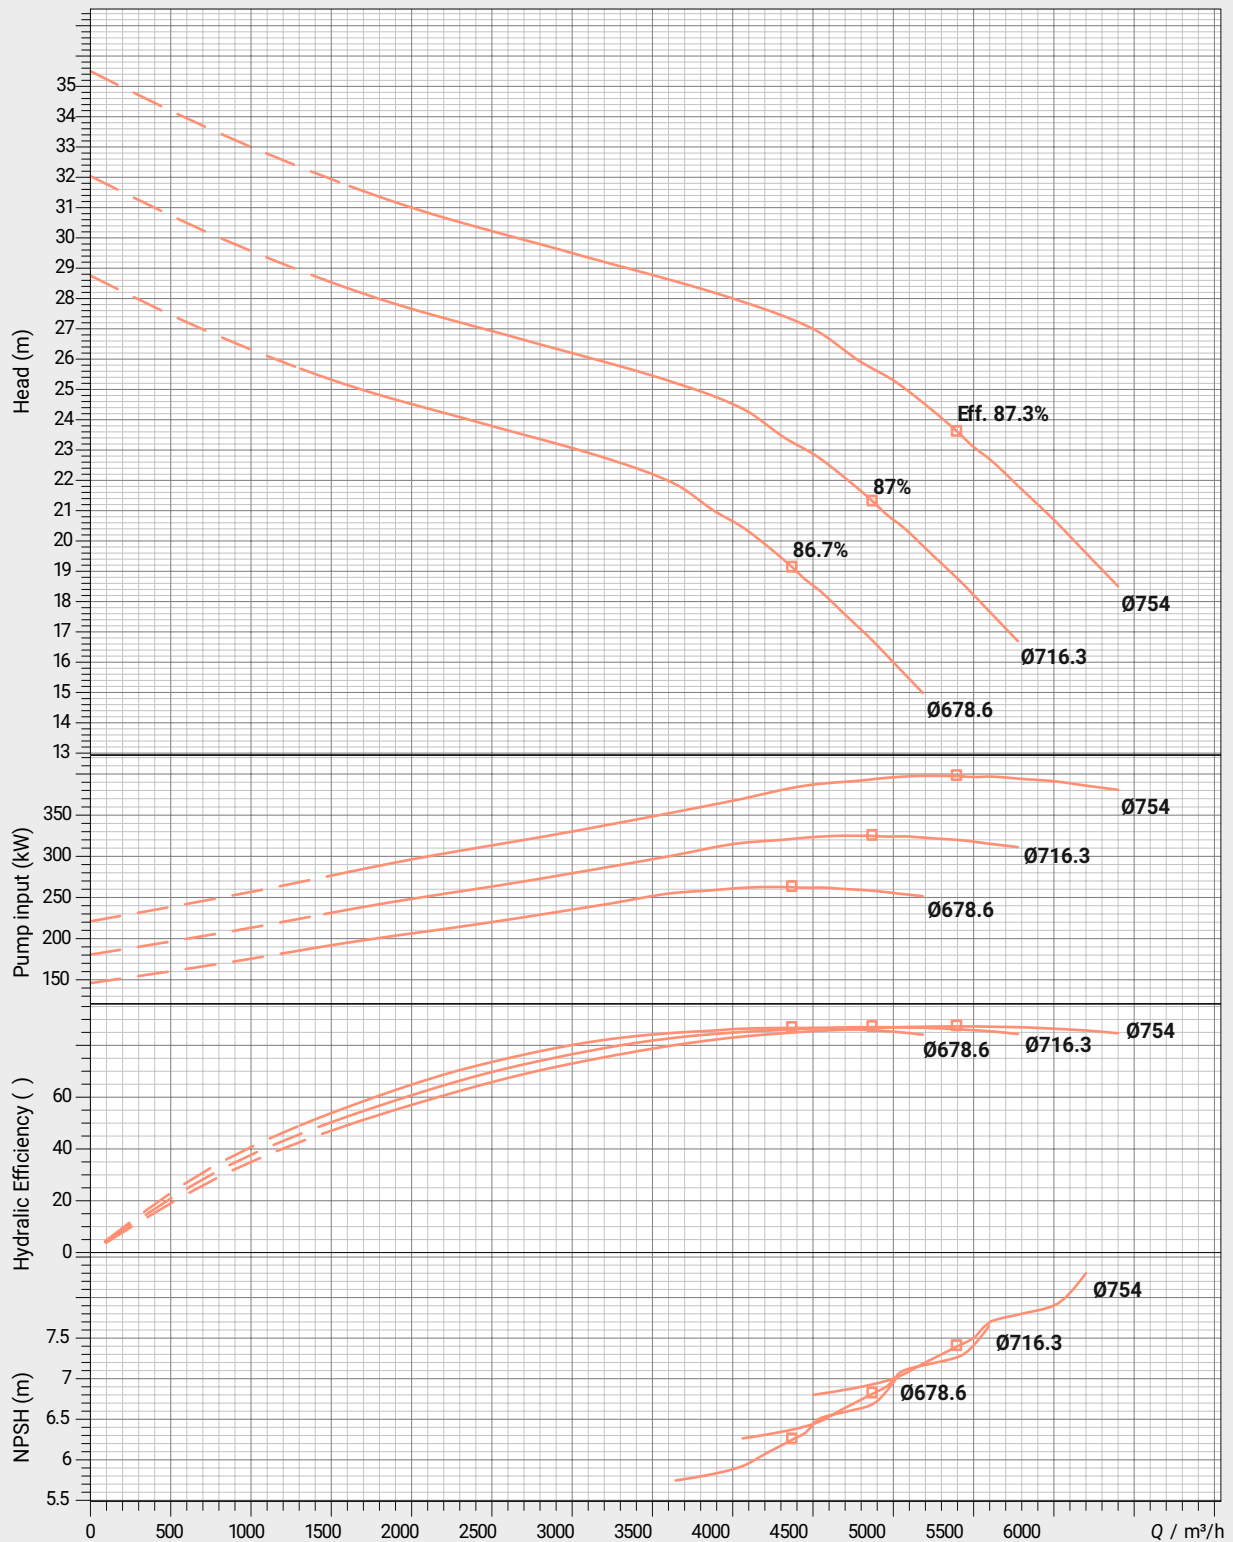

* This pump can be supplied max. 1 stage.


Performance curve tolerances are as per HI : 14.6 / ISO: 9906, Grade 2B

In view of continuous developments the information / performance / descriptions / specifications / illustrations are subject to change without notice

PERFORMANCE CURVES

FVTP - 5600

Speed 590 rpm

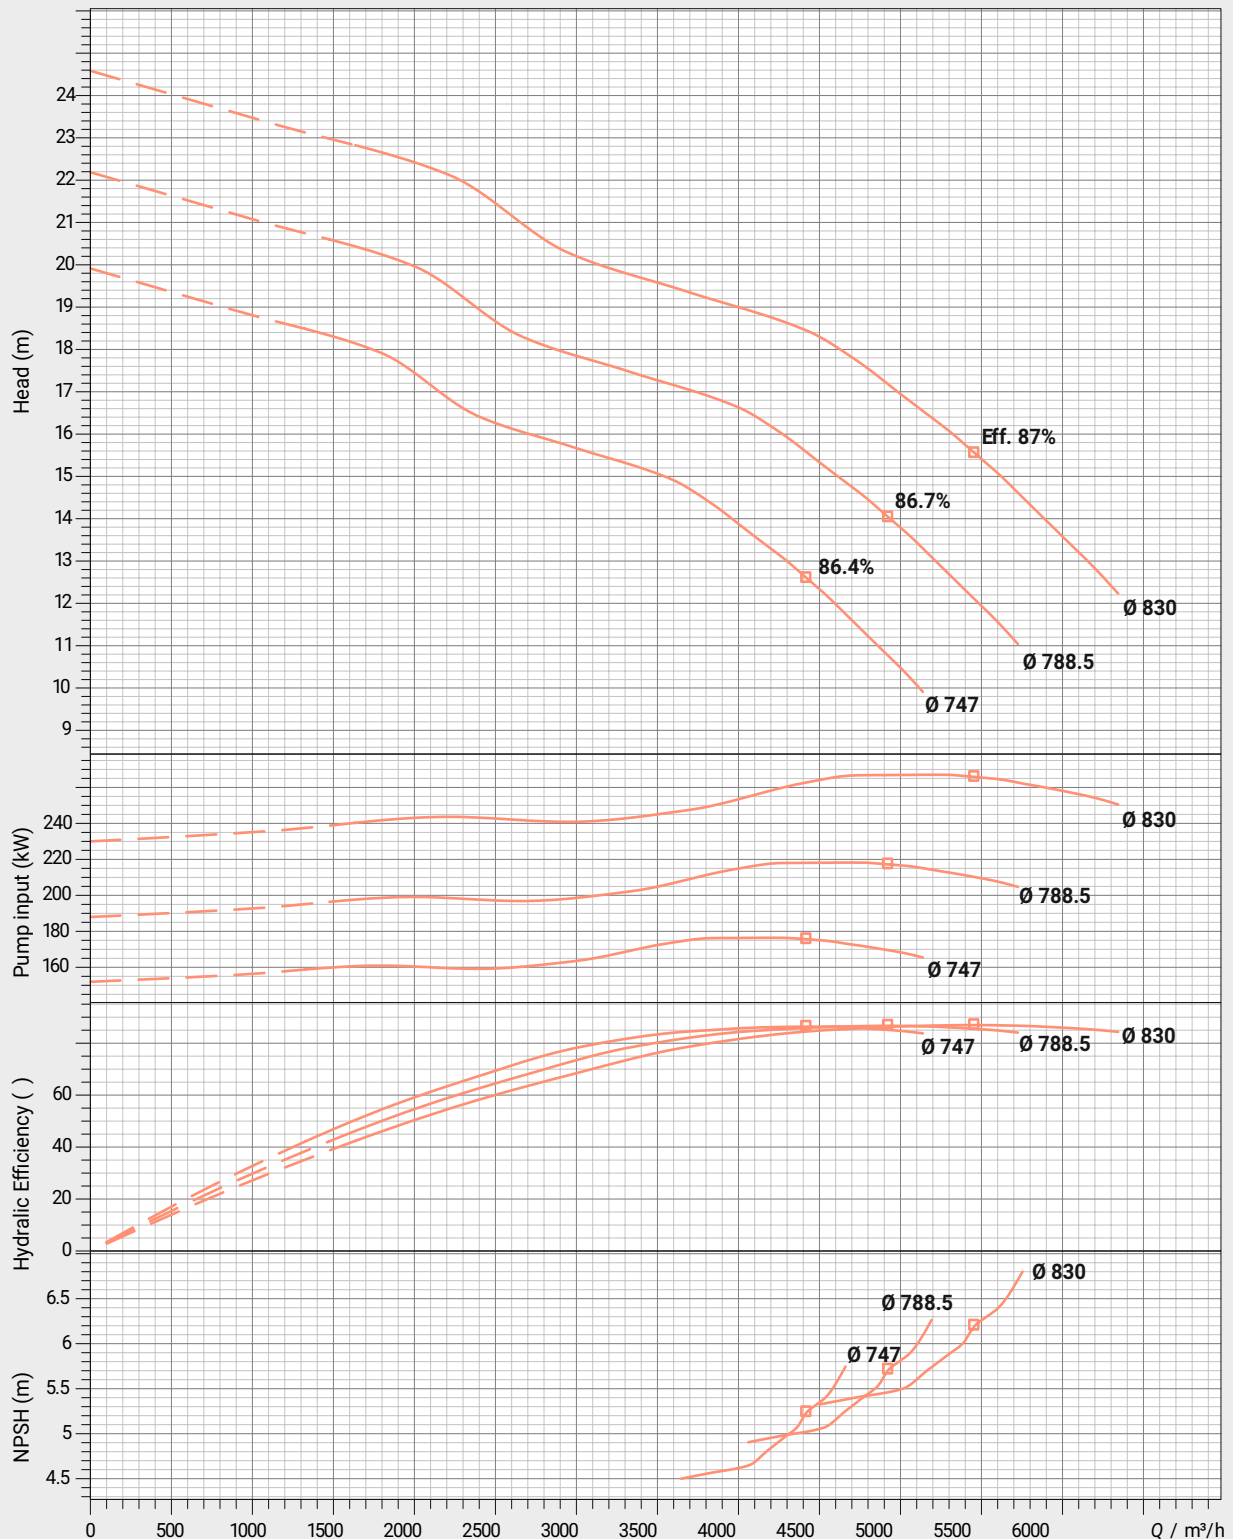

* This pump can be supplied max. 1 stage.


Performance curve tolerances are as per HI : 14.6 / ISO: 9906, Grade 2B

In view of continuous developments the information / performance / descriptions / specifications / illustrations are subject to change without notice

PERFORMANCE CURVES

FVTP - 7300

Speed 730 rpm

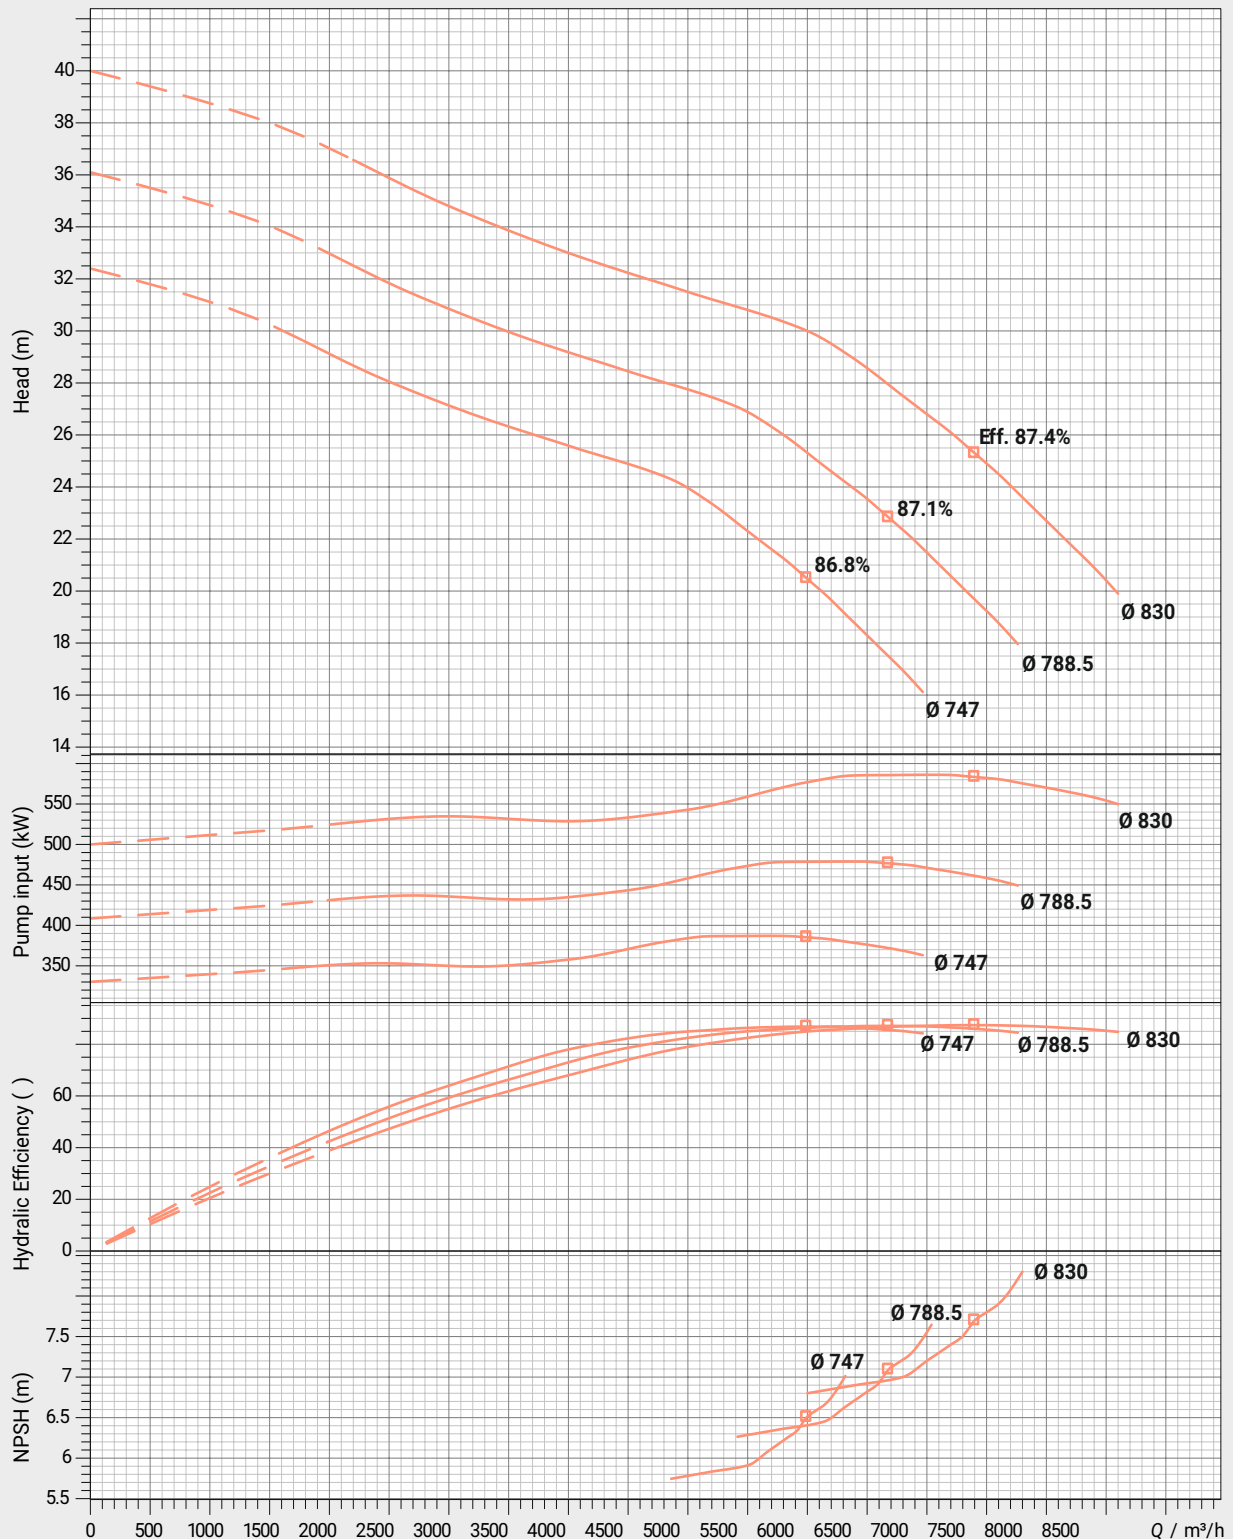

* This pump can be supplied max. 1 stage.


Performance curve tolerances are as per HI : 14.6 / ISO: 9906, Grade 2B

In view of continuous developments the information / performance / descriptions / specifications / illustrations are subject to change without notice

PERFORMANCE CURVES

FVTP - 7400

Speed 590 rpm

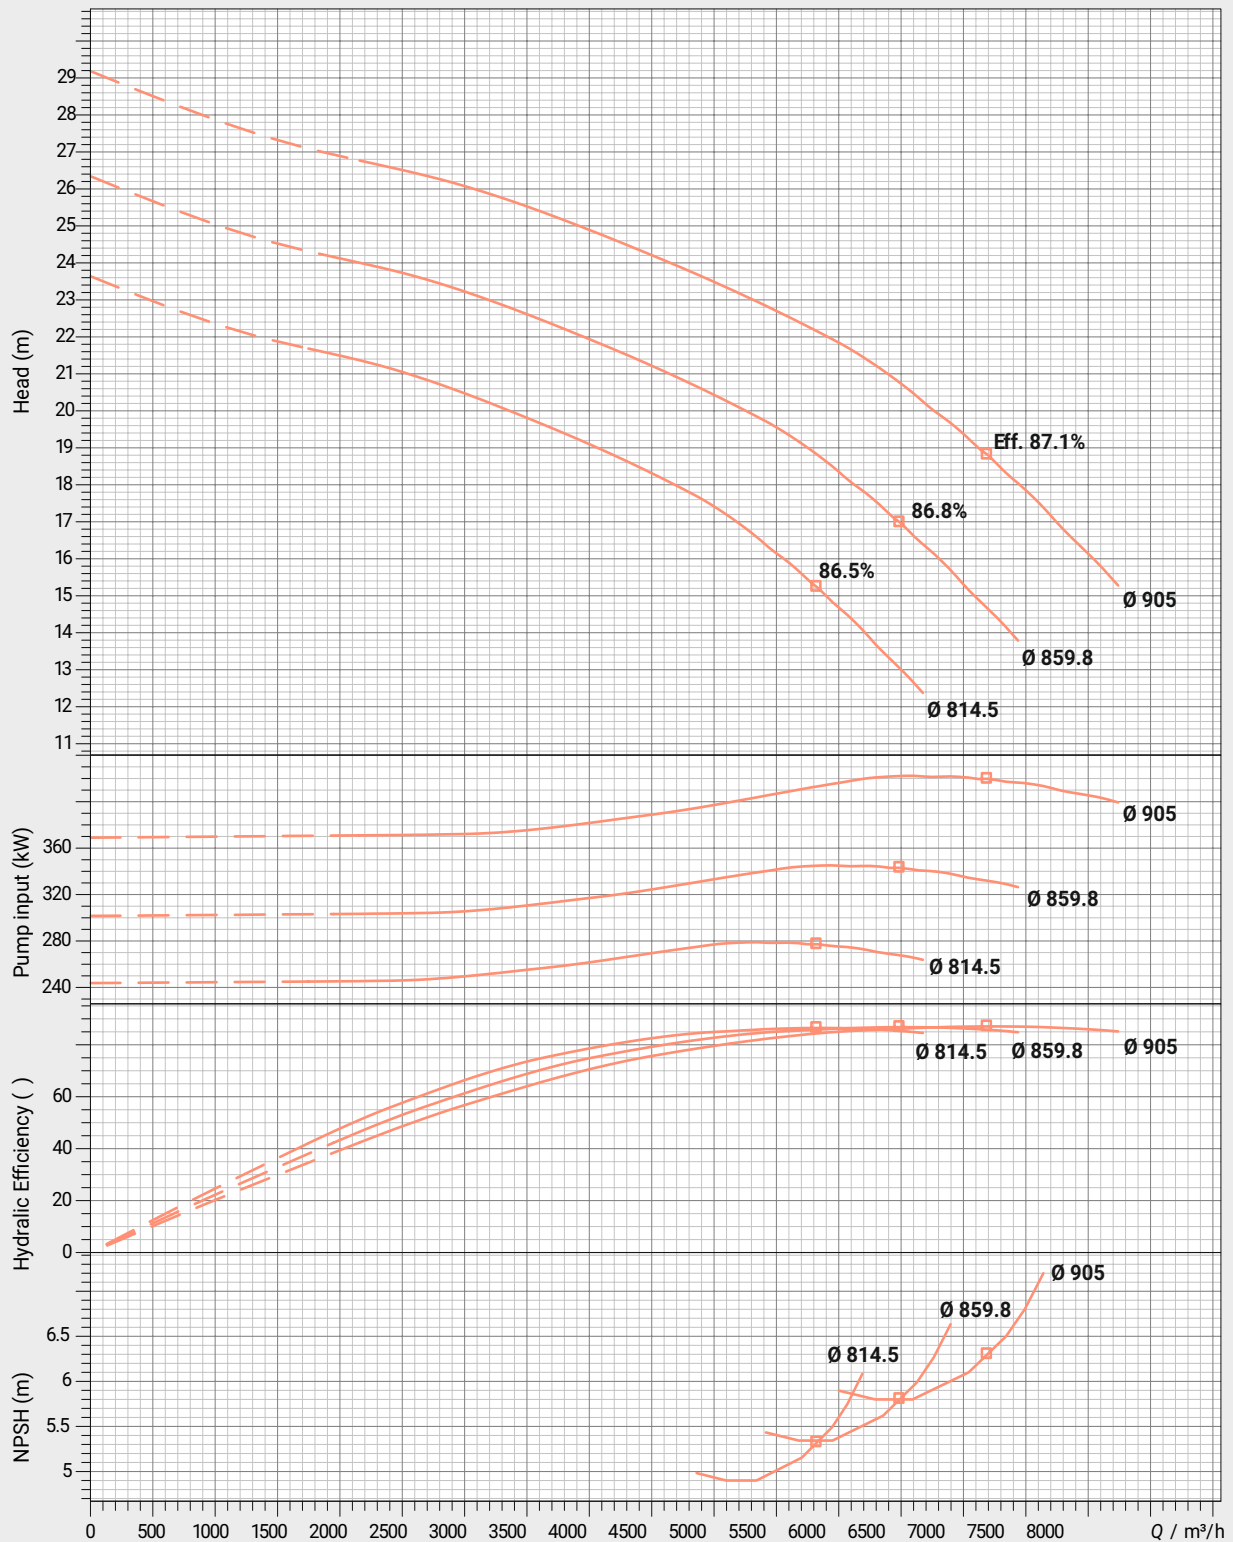

* This pump can be supplied max. 1 stage.


Performance curve tolerances are as per HI : 14.6 / ISO: 9906, Grade 2B

In view of continuous developments the information / performance / descriptions / specifications / illustrations are subject to change without notice

PERFORMANCE CURVES

FVTP - 9500


Speed 730 rpm

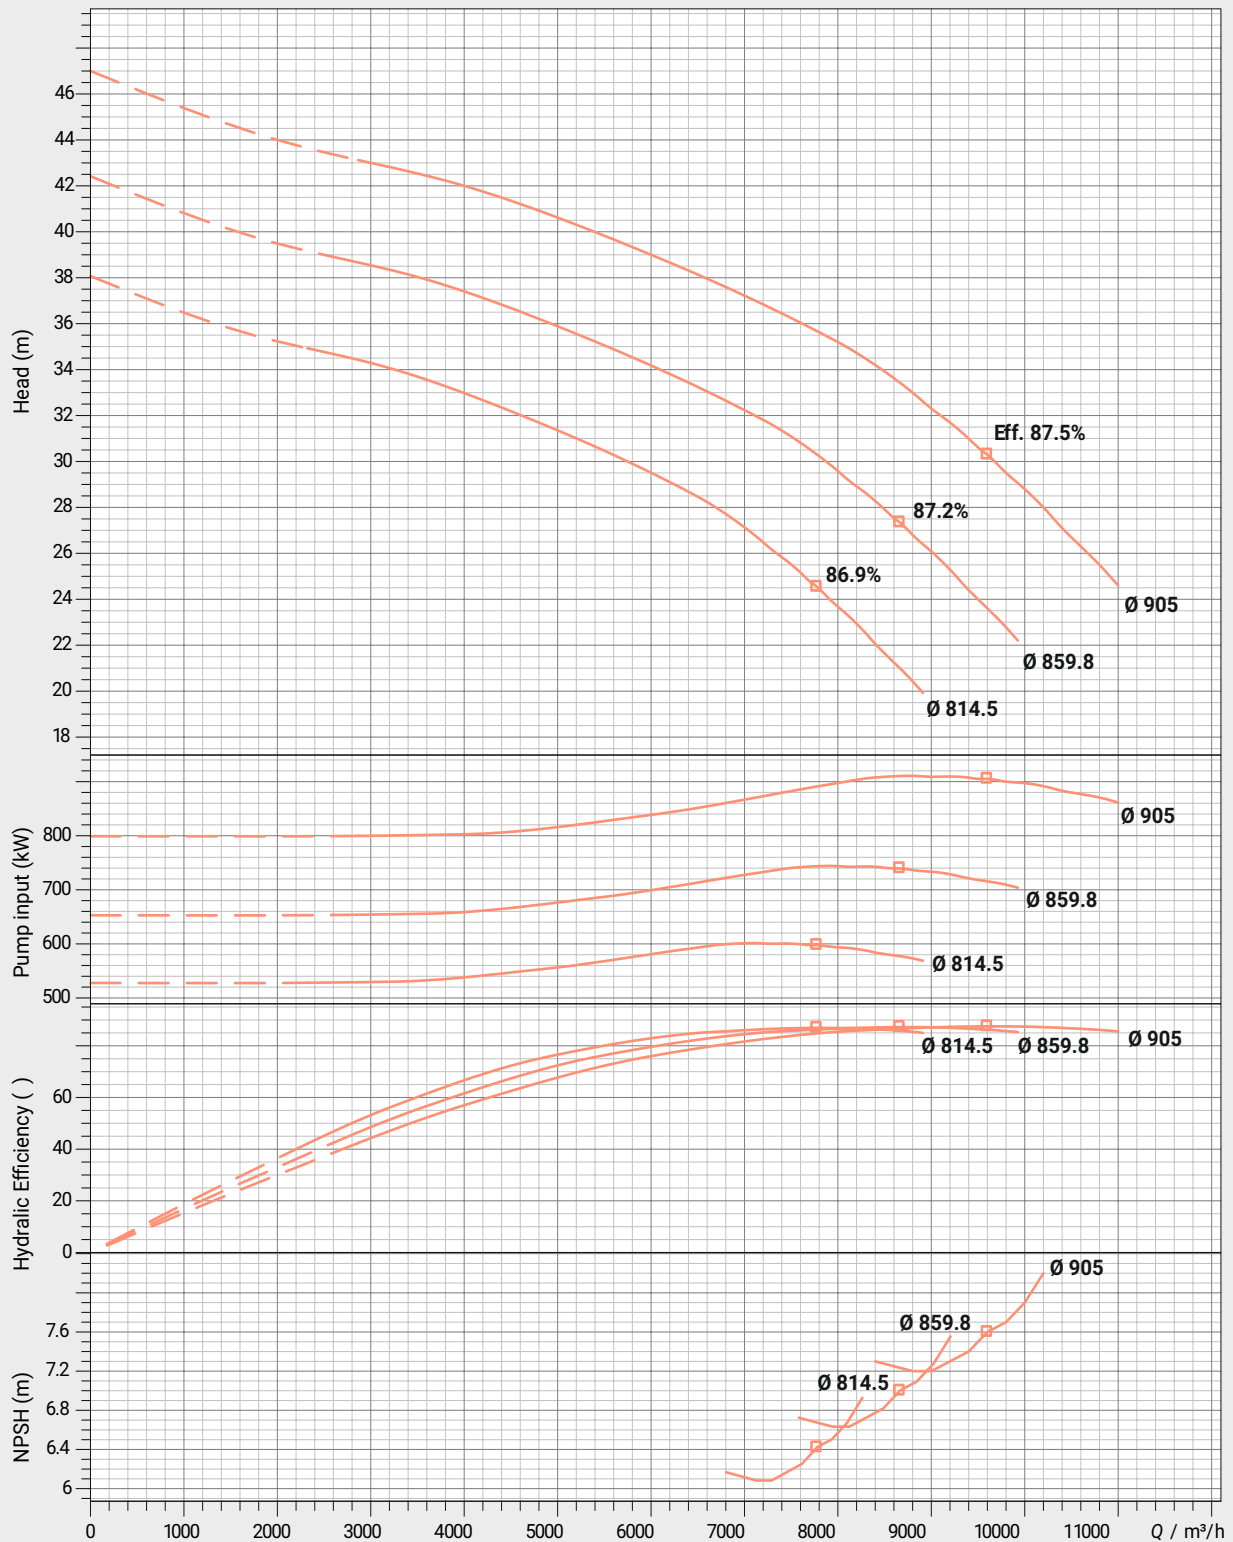

* This pump can be supplied max. 1 stage.

Performance curve tolerances are as per HI : 14.6 / ISO: 9906, Grade 2B

In view of continuous developments the information / performance / descriptions / specifications / illustrations are subject to change without notice

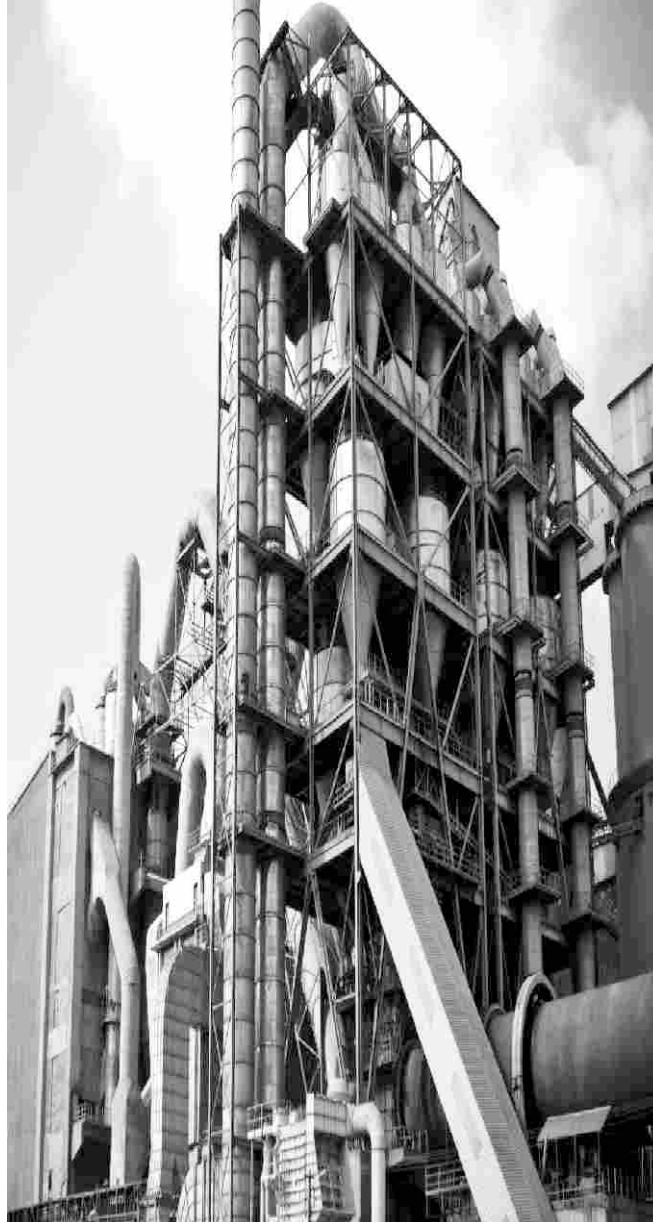

FABBRICA ITALIANA POMPE SOMMERGIBILI S.r.l.

Via dell' Artigianato, 16 - 20090 Pieve Emanuele (MI)-Italy

Tel. + 39 (0) 2 49708488

E-mail: info@fips-pumps.it | www.zirantec.com